

+BRIGHTERBYDESIGN





LED LUMINAIRES

| RECESSED LUMINAIRES | 1 - 10 |
|-----------------------------|---------|
| SURFACE LUMINAIRES | 11-15 |
| RESIDENTIAL LUMINAIRES | 16 - 17 |
| SUSPENDED LUMINAIRES | 18 - 20 |
| TRACK LUMINAIRES | 21 - 23 |
| OFFICE LUMINAIRES | 24 - 29 |
| ARCHITECTURAL LUMINAIRES | 30 - 39 |
| INDUSTRIAL LUMINAIRES | 40 - 41 |
| OUTDOOR & FACADE LUMINAIRES | 42 - 54 |
| LIGHTING ACCESSORIES | 55 |
| | |

RECENT INSTALLATION

56 - 66



Company Vision

To become an Indigenous Company which is the best in terms of quality at an affordable price with sole focus on customer service and satisfaction, employee talent along with consistent and predictable growth. Catering to all the segments in order to win over international and part-time investors.



A BLEND OF ARTISTRY & ENGINEERING

As one of the India's leading lighting corporations, Legero Lighting provides end-to-end solutions, helping its customers to gain aesthetically pleasing & technologically superior lighting solutions.

Legero Lighting was established in 2011 in India; and, since then the Company has been a pioneer and has retained its leadership position in the management and application of lighting solutions.

FROM BRAINSTORM TO REALITY

Based in Noida, India, our research and development facility is staffed by experts in design, engineering and manufacturing who, by taking a holistic approach to R&D, turn ideas into intelligent lighting solutions. Our team is focused on how to use lighting technologies to drive results and deliver lighting solutions. Our goal is to turn ideas into lighting solutions faster, better and more successful than the competition.

- Dedicated team working on product development
- Core focus on details, designs and materials
- Best Quality testing instruments

Team

- Industrial Designers.
- Mechanical Designers.
- Electrical Engineers.










Integrated Sphere



Goniophotometer




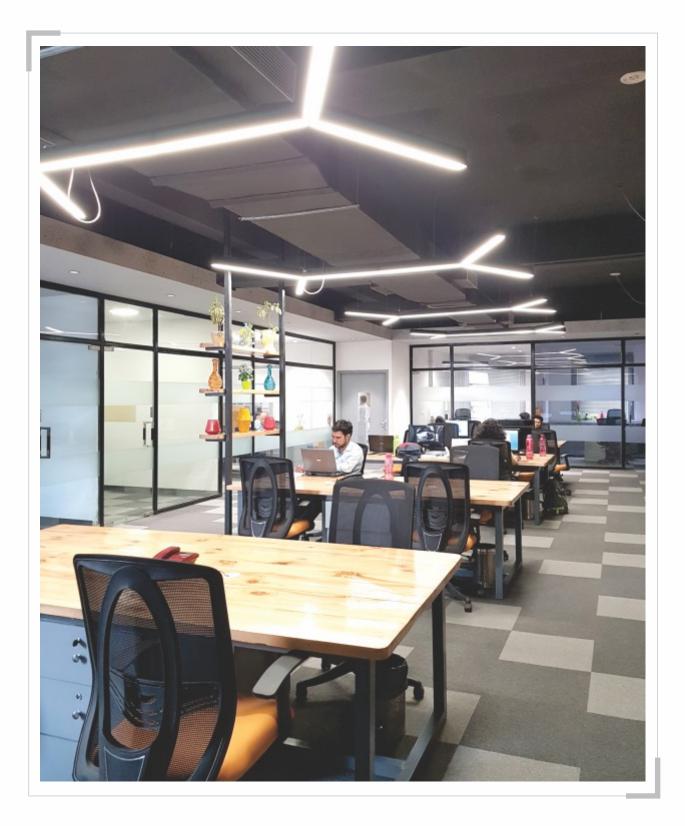

A MAN AN AN



Convinced with LED becoming the future of Lighting, Legero Lighting produces a range of energy efficient, maintenance free LED lighting solutions to meet the needs of the consumers.

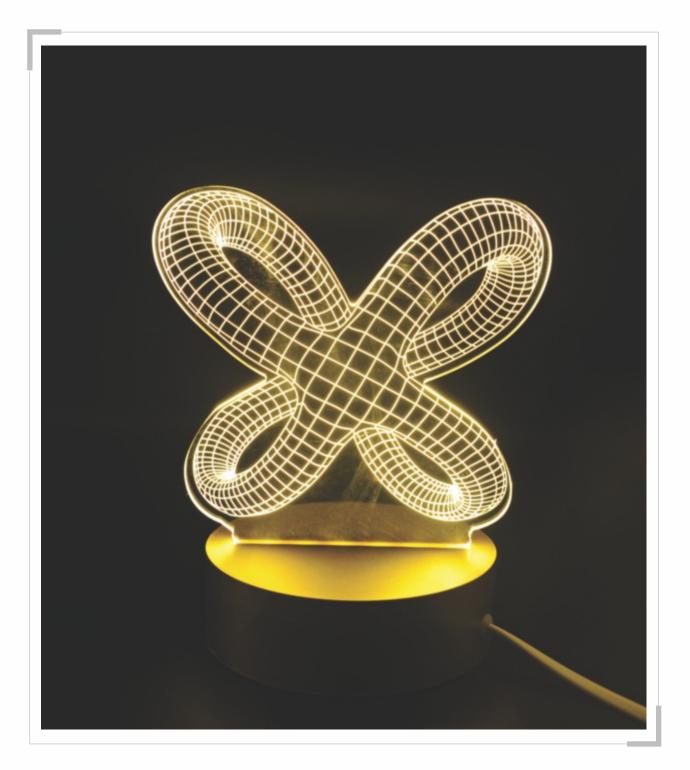






















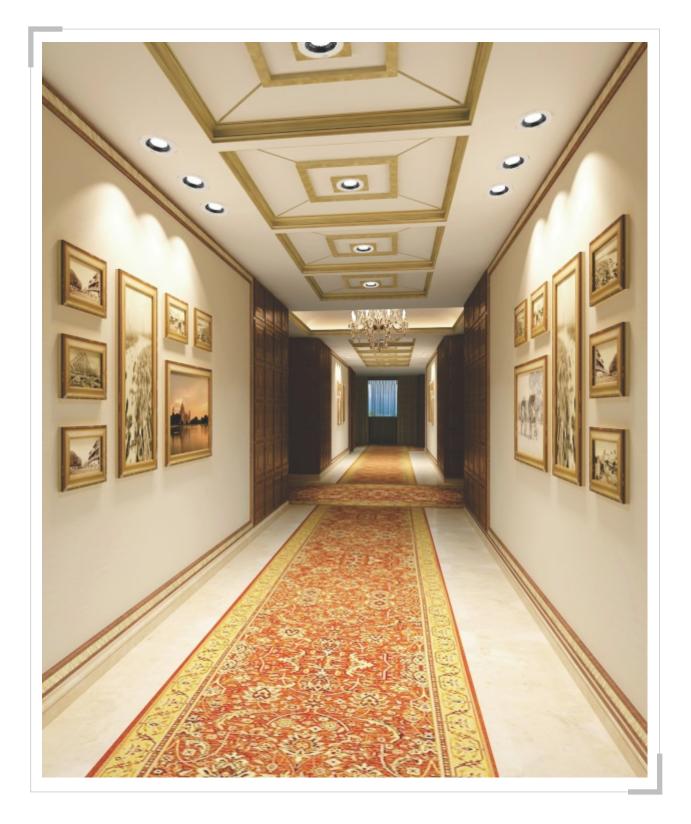


OMEGA



| A versatile collection of energy efficient LED downlight for | | | | |
|--|--|--|--|--|
| general lighting in various applications. These recessed | | | | |
| diffused LED downlights are made of high efficient die-cast | | | | |
| aluminium housing. | | | | |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|-----|
| LVT 6505 | 3000K/4000K/6000K | LED | 5 | 575 |
| LVT 6507 | 3000k/4000K/6000K | LED | 7 | 625 |




RECESSED Luminaires

OMEGA



| A versatile collection of energy efficient LED downlight for | | | | |
|--|--|--|--|--|
| general lighting in various applications. These recessed | | | | |
| diffused LED downlights are made of high efficient die-cast | | | | |
| aluminium housing. | | | | |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LVT 6509 | 3000K/4000K/6000K | LED | 9 | 925 |
| LVT 6512 | 3000k/4000K/6000K | LED | 12 | 1025 |





OMEGA



| A versatile collection of energy efficient LED downlight for |
|--|
| general lighting in various applications. These recessed |
| diffused LED downlights are made of high efficient die-cast |
| aluminium housing. |
| |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LVT 6515 | 3000K/4000K/6000K | LED | 15 | 1375 |
| LVT 6518 | 3000k/4000K/6000K | LED | 18 | 1690 |






BRILLO

Recessed LED downlight with high efficient low glare PMMA diffuser. Fixture made of die-cast aluminium.



| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LDT 7506 | 3000K/4000K/6000K | LED | 6 | 575 |




RECESSED Luminaires

BRILLO



Recessed LED downlight with high efficient low glare PMMA diffuser. Fixture made of die-cast aluminium.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LDT 7515 | 3000K/4000K/6000K | LED | 15 | 1375 |
| LDT 7518 | 3000K/4000K/6000K | LED | 18 | 1690 |




Webler IV

CORAL ROUND

Sleek round panel downlight with integrated edge-lit LEDs installed with highly efficient low glare sheet for optimum light distribution. Available in die-cast aluminium housing .



| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|-----|
| LRS 4006 | 3000K/4000K/6500K | LED | 6 | 450 |




CORAL ROUND

Sleek round panel downlight with integrated edge-lit LEDs installed with highly efficient low glare sheet for optimum light distribution. Available in die-cast aluminium housing .




| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 4012 | 3000K/4000K/6500K | LED | 12 | 660 |



CORAL ROUND

Sleek round panel downlight with integrated edge-lit LEDs installed with highly efficient low glare sheet for optimum light distribution. Available in die-cast aluminium housing.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 4015 | 3000K/4000K/6500K | LED | 15 | 875 |
| LRS 4018 | 3000K/4000K/6500K | LED | 18 | 975 |





AL WAN DU


Sleek square panel downlight with integrated edge-lit LEDs installed with highly efficient low glare sheet for optimum light distribution. Available in die-cast aluminium housing .

| - | 1 |
|---|-------|
| | |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 5006 | 3000K/4000K/6500K | LED | 6 | 450 |

⊠ 86

RECESSED Luminaires




CORAL SQUARE



| Sleek square panel downlight with integrated edge-lit LEDs |
|---|
| installed with highly efficient low glare sheet for optimum light |
| distribution. Available in die-cast aluminium housing. |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 5012 | 3000K/4000K/6500K | LED | 12 | 660 |




CORAL SQUARE

Sleek square panel downlight with integrated edge-lit LEDs installed with highly efficient low glare sheet for optimum light distribution. Available in die-cast aluminium housing .

| - | | a a a b and |
|----|--|-------------|
| 21 | | 1 |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 5015 | 3000K/4000K/6500K | LED | 15 | 875 |
| LRS 5018 | 3000K/4000K/6500K | LED | 18 | 975 |




PEARL ROUND



Sleek round backlit LED down light made up of die cast housing & light weight plastic trim designed for better aesthetics with high efficacy LEDs and diffuser to give glare free output.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 2005 | 3000K/4000K/6500K | LED | 5 | 450 |



Cut Out:Ø77mm

www.legerolighting.com

Luminaires PEARL ROUND

RECESSED


Sleek round backlit LED down light made up of die cast housing & light weight plastic trim designed for better aesthetics with high efficacy LEDs and diffuser to give glare free output.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 2010 | 3000K/4000K/6500K | LED | 10 | 675 |

PEARL ROUND

Sleek round backlit LED down light made up of die cast housing & light weight plastic trim designed for better aesthetics with high efficacy LEDs and diffuser to give glare free output.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LRS 2015 | 3000K/4000K/6500K | LED | 15 | 875 |
| LRS 2018 | 3000K/4000K/6500K | LED | 18 | 1050 |



Cut Out:Ø103mm

Ø130


30

Cut Out:Ø136mm

PEARL SQUARE

| Sleek square backlit LED down light made up of die cast |
|---|
| housing & light weight plastic trim designed for better |
| aesthetics with high efficacy LEDs and diffuser to give glare |
| free output. |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 3005 | 3000K/4000K/6500K | LED | 5 | 450 |






Cut Out : 77mm X 77mm

PEARL SQUARE




Sleek square backlit LED down light made up of die cast housing & light weight plastic trim designed for better aesthetics with high efficacy LEDs and diffuser to give glare free output.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 3010 | 3000K/4000K/6500K | LED | 10 | 675 |










PEARL SQUARE

NAM IN IS

Sleek square backlit LED down light made up of die cast housing & light weight plastic trim designed for better aesthetics with high efficacy LEDs and diffuser to give glare free output.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LRS 3015 | 3000K/4000K/6500K | LED | 15 | 875 |
| LRS 3018 | 3000K/4000K/6500K | LED | 18 | 1050 |



Cut Out :


136mm X136mm

NICK



Compact and sleek downlight used for retail lighting and other indoor applications.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 2006 | 3000K/4000K/6500K | LED | 6 | 310 |






ATOM



The Atom spotlight combines a sharp design with energy efficient LED module. The high quality lens further enhances the quality of the product which is housed within a die-cast aluminium body.

| Product | Color Temperature | Lamp | Watt | MRP |
|------------|-------------------|------|------|-----|
| LRS 1002 | 3000K/6500K | LED | 2 | 275 |
| LRS 1002-R | RED | LED | 2 | 325 |
| LRS 1002-G | GREEN | LED | 2 | 325 |
| LRS 1002-B | BLUE | LED | 2 | 325 |




CEIBA



Small adjustable recessed downlight with die-cast aluminum body & diffuser with 15 degree tilt option, excellent heat sink capability to minimize luminous degradation.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 1005 | 3000K/4000K/6500K | LED | 5 | 475 |




www.legerolighting.com

RECESSED Luminaires



Small adjustable recessed downlight with die-cast aluminum body & reflector with 15 degree tilt option, excellent heat sink capability to minimize luminous degradation.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 1205 | 3000K/4000K/6500K | LED | 5 | 685 |




10000

CIBO



Small adjustable recessed downlight with die-cast aluminum body & lens with 15 degree tilt option, excellent heat sink capability to minimize luminous degradation. Its unique design enable to serve with lens.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 1103 | 3000K/4000K/6500K | LED | 3 | 590 |
| LRS 1105 | 3000K/4000K/6500K | LED | 5 | 625 |




GIA



| Small Recessed COB Round down lights made of die | cast |
|---|------|
| aluminum with powder coating finish. Excellent heat | sink |
| capacity to minimize luminous degradation. | |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 8008 | 3000K/4000K/6500K | LED | 8 | 910 |





MIA



Small Recessed COB Square down lights made of die cast aluminum with powder coating finish. Excellent heat sink capacity to minimize luminous degradation.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 8108 | 3000K/4000K/6500K | LED | 8 | 910 |






AVIO

West In



The COB spot light with softly contoured aluminium reflector and energy efficient light source that combines to produce a luminaire of exceptional style and performance.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LRS 7007 | 3000K/4000K/6500K | LED | 7 | 895 |
| LRS 7012 | 3000K/4000K/6500K | LED | 12 | 1095 |
| LRS 7014 | 3000K/4000K/6500K | LED | 14 | 1250 |




RECESSED Luminaires

STELLA



Recessed adjustable COB downlight in circular shape made of die cast aluminium housing and has robust heat sink for excellent thermal management. It consist of high efficiency aluminium reflector to produce excellent light output.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LHR 5508 | 3000K/4000K/5700K | LED | 7 | 1090 |
| LHR 5512 | 3000K/4000K/5700K | LED | 12 | 1275 |
| LHR 5514 | 3000K/4000K/5700K | LED | 14 | 1490 |




IRIS



Unique and exciting range of exceptionally sleek recessed COB spot lights. It consist of high efficiency aluminium reflector to produce excellent light output. Fixture is made of die-cast aluminium powder coated housing.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LHR 5808 | 3000K/4000K/5700K | LED | 7 | 1175 |
| LHR 5812 | 3000K/4000K/5700K | LED | 10 | 1325 |
| LHR 5814 | 3000K/4000K/5700K | LED | 14 | 1525 |




IRIS-D



Unique and exciting range of exceptionally sleek recessed COB spot lights. It consist of high efficiency Diffuser. Fixture is made of die-cast aluminium powder coated housing.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LHD 5108 | 3000K/4000K/5700K | LED | 7 | 1225 |
| LHD 5110 | 3000K/4000K/5700K | LED | 10 | 1375 |
| LHD 5114 | 3000K/4000K/5700K | LED | 14 | 1575 |



www.legerolighting.com


RECESSED Luminaires

VIVA



The oval slot trim COB downlight features a deep recessed lamp position for minimal glare. This is a recessed downlight for application that requires maximum visual comfort & the highest standard of light quality.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LHR 6308 | 3000K/4000K/5700K | LED | 7 | 1090 |
| LHR 6312 | 3000K/4000K/5700K | LED | 10 | 1390 |
| LHR 6314 | 3000K/4000K/5700K | LED | 14 | 1650 |




11249/ 10

LEO



Pinhole deep COB features a small diameter aperture & a deep recessed lamp position that provides optical glare control. This is a recessed downlight for application that requires maximum visual comfort & the highest standard of light quality.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LHR 6408 | 3000K/4000K/5700K | LED | 7 | 1090 |
| LHR 6412 | 3000K/4000K/5700K | LED | 10 | 1390 |
| LHR 6414 | 3000K/4000K/5700K | LED | 14 | 1650 |




VELA



| The COB wallwasher with softly contoured aluminium reflector |
|--|
| & energy efficient light source that combines to produce a |
| luminaire of exceptional performance. |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LHR 6508 | 3000K/4000K/5700K | LED | 7 | 1250 |
| LHR 6512 | 3000K/4000K/5700K | LED | 10 | 1450 |
| LHR 6514 | 3000K/4000K/5700K | LED | 14 | 1675 |




NOVA




Decorative deep COB spot downlight combines high output, varied lamp technology made in die-cast aluminium designer trim.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LRS 5107 | 3000K/4000K/6500K | LED | 7 | 895 |
| LRS 5112 | 3000K/4000K/6500K | LED | 10 | 1095 |
| LRS 5114 | 3000K/4000K/6500K | LED | 14 | 1250 |



Decorative deep COB spot downlight combines high output, varied lamp technology with a black inner smooth reflector. Made in die-cast aluminium designer trim with textured powder coating.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LHR 5608 | 3000K/4000K/5700K | LED | 7 | 1250 |
| LHR 5612 | 3000K/4000K/5700K | LED | 10 | 1375 |
| LHR 5614 | 3000K/4000K/5700K | LED | 14 | 1775 |



RECESSED Luminaires

Ø105

ARIA

A NAM IN IS


SOL





High efficiency square COB recessed downlight encompassing of die-cast trim and deep recessed reflector to cut glare. Suitable for multiple applications. Optical and thermal solution for high performance.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LRS 9007 | 3000K/4000K/6500K | LED | 7 | 925 |
| LRS 9012 | 3000K/4000K/6500K | LED | 12 | 1125 |
| LRS 9014 | 3000K/4000K/6500K | LED | 14 | 1275 |



DOCCO




| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LHR 6408 | 3000K/4000K/5700K | LED | 7 | 1350 |
| LHR 6412 | 3000K/4000K/5700K | LED | 10 | 1675 |
| LHR 6414 | 3000K/4000K/5700K | LED | 14 | 1975 |

Compact styling, clean fascias and enclosed precision die-

cast adjustable lamp housing with aluminium reflector &

energy efficient light sources.




DOUBLE DOCCO



Twin decorative COB downlight, compact styling, clean fascias and enclosed precision die-cast adjustable lamp housing with aluminium reflector & energy efficient light sources.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LHR 6116 | 3000K/4000K/5700K | LED | 14 | 2650 |
| LHR 6124 | 3000K/4000K/5700K | LED | 20 | 3350 |
| LHR 6128 | 3000K/4000K/5700K | LED | 28 | 3900 |



www.legerolighting.com




RECESSED Luminaires



| sources. | | | | |
|----------|-------------------|------|------|------|
| Product | Color Temperature | Lamp | Watt | MRP |
| LHR 6624 | 3000K/4000K/5700K | LED | 21 | 3975 |
| LHR 6636 | 3000K/4000K/5700K | LED | 30 | 4975 |
| LHR 6642 | 3000K/4000K/5700K | LED | 42 | 5850 |

Triple decorative COB downlight, compact styling, clean fascias and enclosed precision die-cast adjustable lamp housing with aluminium reflector & energy efficient light




11269/1

AVIO



High efficiency COB recessed downlight encompassing of die-cast trim and deep recessed reflector with glass to cut glare. Suitable for multiple applications. Optical and thermal solution for high performance.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LRS 7018 | 3000K/4000K/6500K | LED | 18 | 1725 |
| LRS 7022 | 3000K/4000K/6500K | LED | 22 | 1890 |




OMEGA-R



Recessed COB downlights made of high efficiency die-cast aluminium with powder coated finish. Available with comprehensive choice of color temperatures and wattages.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LVT 6415 | 3000K/4000K/5700K | LED | 15 | 2350 |
| LVT 6420 | 3000K/4000K/5700K | LED | 20 | 2675 |
| LVT 6425 | 3000K/4000K/5700K | LED | 25 | 2975 |
| LVT 6430 | 3000K/4000K/5700K | LED | 30 | 3490 |




SIGMA




The design features include fully enclosed precision die-cast aluminium construction, excellent pan and tilt adjustment. These adjustable recessed single chip COB downlights consist of high purity aluminium reflector.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LHR 6525 | 3000K/4000K/5700K | LED | 25 | 4475 |
| LHR 6535 | 3000K/4000K/5700K | LED | 35 | 5275 |



www.legerolighting.com

Page 10

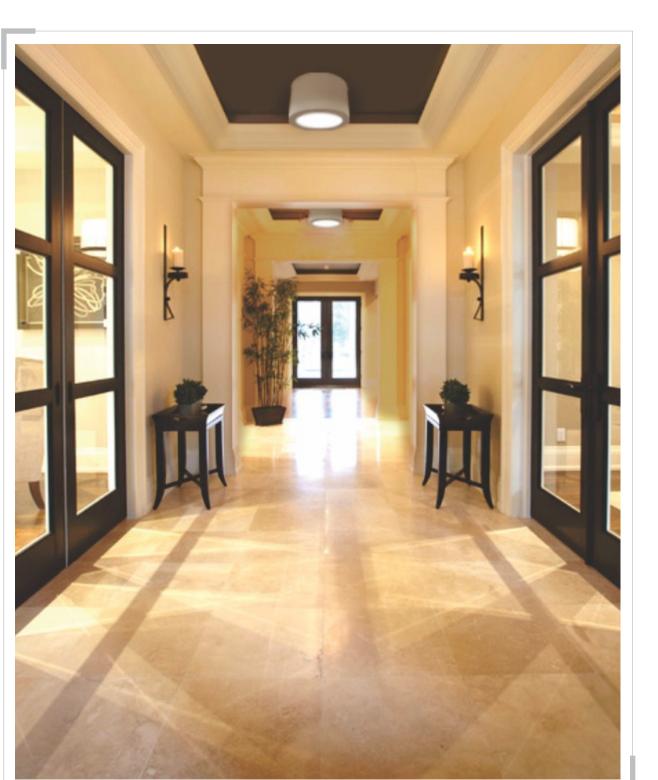

SURFACE Luminaires






CORAL SURFACE SQUARE



Surface mounted square panel downlight used for office lighting, retail lighting & other indoor applications.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|-----|
| LRS 4106 | 3000K/4000K/6500K | LED | 6 | 575 |
| | | | | |




CORAL SURFACE SQUARE



| Surface mounted square panel downlight used for office | | | | | |
|--|--|--|--|--|--|
| lighting, retail lighting & other indoor applications. | | | | | |
| | | | | | |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 4112 | 3000K/4000K/6500K | LED | 12 | 750 |
| | ,, | | . – | |




CORAL SURFACE



| Surface mounted | round | panel | downlight | used | for | office |
|--------------------------|--------|----------|--------------|------|-----|--------|
| lighting, retail lightin | ng&oth | ner indo | or applicati | ons. | | |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 3106 | 3000K/4000K/6500K | LED | 6 | 575 |



CORAL SURFACE

Surface mounted round panel downlight used for office lighting, retail lighting & other indoor applications.



| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 3112 | 3000K/4000K/6500K | LED | 12 | 750 |






CORAL SURFACE



Surface mounted round panel downlight used for office lighting, retail lighting & other indoor applications.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LRS 3115 | 3000K/4000K/6000K | LED | 15 | 1125 |
| LRS 3118 | 3000K/4000K/6000K | LED | 18 | 1275 |




SURFACE Luminaires

CLOUD



| Surface m | nounted | down | light | with | n curv | /ed | edge | s having |
|----------------|----------|---------|-------|------|--------|-----|--------|----------|
| integrated | LEDs. In | stalled | with | low | glare | she | et for | optimum |
| light distribu | ution. | | | | | | | |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LRS 2215 | 3000K/4000K/6500K | LED | 15 | 1290 |



OMEGA SURFACE

Surface LED downlight. Housing made of CRCA. Specular finished diffuser with high efficient LEDs for better light distribution..

| | | Product |
|--|--|----------|
| | | LVS 6512 |
| | | |
| | | |

| Product | Color Temperature | Lamp | Watt | MRP |
|---------|-------------------|------|------|------|
| VS 6512 | 3000K/4000K/6000K | LED | 12 | 1790 |





OMEGA SURFACE Surface LED downlight. Housing made of CRCA. Specular finished diffuser with high efficient LEDs for better light distribution..



| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LVS 6515 | 3000K/4000K/6000K | LED | 15 | 2175 |
| LVS 6518 | 3000K/4000K/6000K | LED | 18 | 2650 |





AL WAY IN D

Page 13

www.legerolighting.com

www.legerolighting.com

ZION D SURFACE

SURFACE Luminaires

Surface COB downlight. Housing made of CRCA. Specular finished diffuser with high efficient COB for better light distribution.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LSM 5615 | 3000K/4000K/5700K | LED | 15 | 2425 |

Surface mounted cylindrical COB downlight with high efficient COB and reflector for better light distribution suitable for retail, hospitality and residential application area.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LRS 3307 | 3000K/4000K/6500K | LED | 7 | 990 |
| LRS 3312 | 3000K/4000K/6500K | LED | 12 | 1090 |
| LRS 3314 | 3000K/4000K/6500K | LED | 14 | 1290 |



Ø103 Ø72 Ø47

129

OMEGA R SURFACE



| Product | Color Temperature | Lamp | Watt | MRP |
|------------|-------------------|------|------|------|
| LVS R 6520 | 3000K/4000K/5700K | LED | 20 | 3375 |
| LVS R 6525 | 3000K/4000K/5700K | LED | 25 | 3775 |
| LVS R 6530 | 3000K/4000K/5700K | LED | 30 | 4150 |


Surface COB downlight with high efficient COB & reflector for

better light distribution. Housing made of CRCA.

NORA

Surface mounted adjustable COB downlight with high efficient COB and reflector for better light distribution suitable for retail, hospitality and residential application area.


| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LDN 7110 | 3000K/4000K/5700K | LED | 1x10 | 1550 |
| LDN 7114 | 3000K/4000K/5700K | LED | 1x14 | 1850 |





103





Ø94



NORA-D


1

A MAN AN AN

Surface mounted adjustable COB downlight with high efficient COB and reflector for better light distribution suitable for retail, hospitality and residential application area.

| A.D |)''(| T | 5 |
|-----|------|---|---|

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LDN 7210 | 3000K/4000K/5700K | LED | 2x10 | 3250 |
| LDN 7214 | 3000K/4000K/5700K | LED | 2x14 | 3650 |



SURFACE Luminaires

RESIDENTIAL



Exceptional bright light with significant energy saving offering long life, durability, zero maintenance & no harmful emissions. Available in B22 base.

| H | 1 | |
|---|----|--|
| Ū | J. | |

| Product | Color Temperature | Lamp | Watt | MRP |
|---------|-------------------|------|------|-----|
| LED B 3 | 3000K/5700K | LED | 3 | 140 |
| LED B 5 | 3000K/5700K | LED | 5 | 160 |
| LED B 7 | 3000K/5700K | LED | 7 | 170 |
| LED B 9 | 3000K/5700K | LED | 9 | 195 |
| | | | | |

CADY



| Product | Color Temperature | Lamp | Watt | MRP |
|---------|-------------------|------|------|-----|
| CADY Y | YELLOW | LED | 0.5 | 58 |
| CADYO | ORANGE | LED | 0.5 | 58 |
| CADY W | WHITE | LED | 0.5 | 58 |
| CADY G | GREEN | LED | 0.5 | 58 |
| CADY B | BLUE | LED | 0.5 | 58 |
| CADY R | RED | LED | 0.5 | 58 |

Low power LED Bulbs in multiple color options.

LINO

Decorative LED batten light in square shape with high efficient PC Cover & end caps



| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 9110 | 3000K/4000K/6500K | LED | 10 | 390 |



11269/



LINO

Decorative LED batten light in square shape with high efficient PC Cover & end caps

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-----|
| LRS 9118 | 3000K/4000K/6500K | LED | 18 | 440 |







residential ^{>>>} Luminaires

L

LYNX (IP 20)

112001

Flexible LED striplights made of bright LED chips, high quality thermal PCB board and an unmatched quality control process. It is an **IP 20** product.



| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|---------|
| LRS 2106 | 3000K/4000K/6500K | LED | 6 | 240/mtr |
| LRS 2114 | 3000K/4000K/6500K | LED | 14 | 375/mtr |

LRS 2106D *Driver for 6watt LED strip light per 5 meter Rs. 395 LRS 2114D *Driver for 14watt LED strip light per 5 meter Rs. 850

LYNX (IP 65)

Flexible LED striplights made of bright LED chips, high quality thermal PCB board and an unmatched quality control process. It is an **IP 65** product.



| Product | Color Temperature | Lamp | Watt | MRP |
|---|-------------------|------|------|---------|
| LRS 2206 | 3000K/4000K/6500K | LED | 6 | 425/mtr |
| LRS 2214 | 3000K/4000K/6500K | LED | 14 | 625/mtr |
| All prices are exclusive of the driver cost, Available in 5mtr. roll. | | | | |

LRS 2206D *Driver for 6watt IP 65 LED strip light per 5 meter : Price on request LRS 2214D *Driver for 14watt IP 65 LED strip light per 5 meter : Price on request

LYNX (IP 67)




| Product | Color Temperature | Lamp | Watt | MRP |
|---|--------------------------|------|------|---------|
| LRS 2306 | 3000K/4000K/6500K | LED | 6 | 525/mtr |
| LRS 2314 | 3000K/4000K/6500K | LED | 14 | 790/mtr |
| All prices are exclusive of the driver cost, Available in 5mtr. roll. | | | | |

Flexible LED striplights made of bright LED chips, high quality thermal PCB board and an unmatched quality control

process. It is an **IP 67** product.

LRS 2306D *Driver for 6watt IP 67 LED strip light per 5 meter : Price on request LRS 2314D *Driver for 14watt IP 67 LED strip light per 5 meter : Price on request

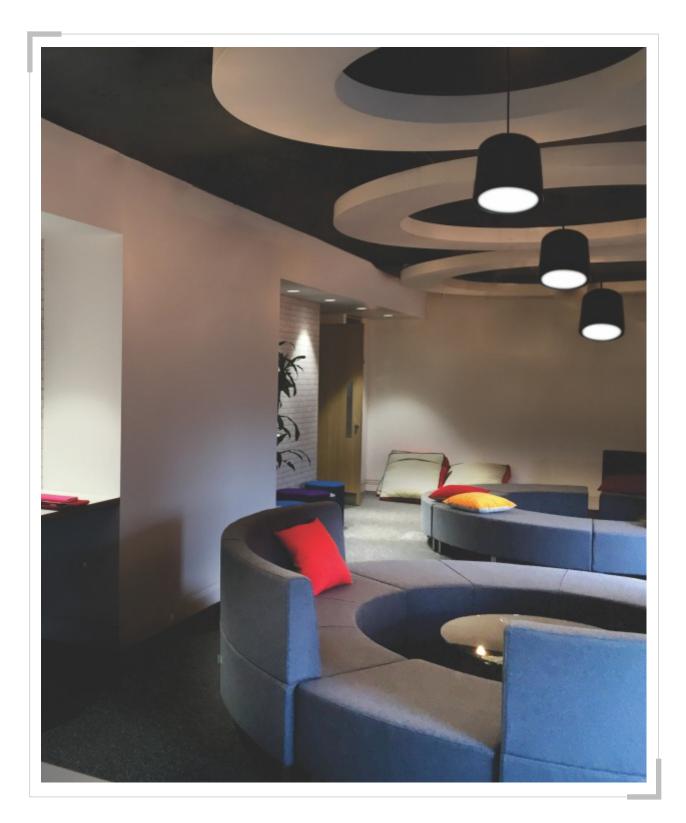

 $\times\!\!\times\!\!\times\!\!\times\!\!\times\!\!\times\!\!\times$

suspended Luminaires

OMEGA SUSPENDED

WAR IV



Suspended LED downlight. Housing made of CRCA. Specular finished diffuser with high efficient LED for better light distribution.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LVS 6712 | 3000K/4000K/6000K | LED | 12 | 1950 |



SUSPENDED




OMEGA SUSPENDED



Suspended LED downlight. Housing made of CRCA. Specular finished diffuser with high efficient LED for better light distribution.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LVS 6715 | 3000K/4000K/6000K | LED | 15 | 2375 |
| LVS 6718 | 3000K/4000K/6000K | LED | 18 | 2775 |





Surface COB downlight. Housing made of CRCA. Specular finished diffuser with high efficient COB for better light distribution.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LSM 5715 | 3000K/4000K/5700K | LED | 15 | 2575 |






OMEGA R SUSPENDED



Suspended COB downlight with high efficient COB and reflector for better light distribution. Housing made of CRCA.

| Product | Color Temperature | Lamp | Watt | MRP |
|------------|--------------------------|------|------|------|
| LVS R 6820 | 3000K/4000K/5700K | LED | 20 | 3575 |
| LVS R 6825 | 3000K/4000K/5700K | LED | 25 | 3875 |
| LVS R 6830 | 3000K/4000K/5700K | LED | 30 | 4275 |





Page 19

www.legerolighting.com


suspended ~~

NORA SUSPENDED



Suspended adjustable COB downlight with high efficient COB and reflector for better light distribution suitable for retail, hospitality and residential application area.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LDN 7310 | 3000K/4000K/5700K | LED | 1x10 | 1750 |
| LDN 7314 | 3000K/4000K/5700K | LED | 1x14 | 2050 |



NAM IV


NORA-D SUSPENDED

70 70

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LDN 7410 | 3000K/4000K/5700K | LED | 2x10 | 3400 |
| LDN 7414 | 3000K/4000K/5700K | LED | 2x14 | 4050 |

hospitality and residential application area.

Suspended adjustable COB downlight with high efficient COB and reflector for better light distribution suitable for retail,








Track Luminaires

ALVO



Alvo track light is highly efficient with a low-profile design. Ideal for accent and display lighting applications, the fixtures feature die-cast aluminium construction in sleek, simple designs.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LTL 1220 | 3000K/4000K/5700K | LED | 20 | 3750 |
| LTL 1225 | 3000K/4000K/5700K | LED | 25 | 4275 |
| LTL 1230 | 3000K/4000K/5700K | LED | 30 | 4650 |





AURA



Organic design with die cast housing & heat sink for efficient heat dissipation. Ideal for retail & hospitality. Curved deep diamond facet reflector with glass to cut glare. Optical and thermal solution for high performance.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LAU 0018 | 3000K/4000K/5700K | LED | 18 | 3675 |
| LAU 0024 | 3000K/4000K/5700K | LED | 24 | 4350 |
| LAU 0030 | 3000K/4000K/5700K | LED | 30 | 4775 |






AURA SURFACE



Surface mounted die cast housing and heat sink for efficient heat dissipation in surface mounted option. Can be installed directly on ceiling. Curved deep diamond facet reflector with glass to cut glare.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LAU 1018 | 3000K/4000K/5700K | LED | 18 | 3775 |
| LAU 1024 | 3000K/4000K/5700K | LED | 24 | 4450 |
| LAU 1030 | 3000K/4000K/5700K | LED | 30 | 4950 |




ALVO SURFACE



Surface mounted Alvo track light is highly efficient with a lowprofile design. Ideal for accent and display lighting applications, the fixtures feature die-cast aluminium construction in sleek, simple designs.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LTL 1120 | 3000K/4000K/5700K | LED | 20 | 3850 |
| LTL 1125 | 3000K/4000K/5700K | LED | 25 | 4375 |



www.legerolighting.com

Page 22



SINGLE PHASE TRACK (1m)

11261/1



Extruded aluminium construction. Track offers separately controlled circuit with live adaptor& end cap.

| TACT 1001 WHITE | 1575 |
|-----------------|------|
| TACT 1002 BLACK | 1575 |




SINGLE PHASE TRACK (2m)



| Product | Color | MRP |
|-----------|-------|------|
| TACT 2001 | WHITE | 2550 |
| TACT 2002 | BLACK | 2550 |

Extruded aluminium construction. Track offers separately

controlled circuit with live adaptor & end cap.




MINI JOINER SINGLE PHASE



Join two sections of straight track end to end.

| Product | Color | MRP |
|----------|-------|-----|
| TAMJ 001 | WHITE | 310 |
| TAMJ 002 | BLACK | 310 |




SUSPENSION KIT




Includes track bracket, rods and suspension wires.

| Product | Color | MRP |
|-----------|-------|-----|
| TASK 3001 | WHITE | 850 |
| TASK 3002 | BLACK | 850 |






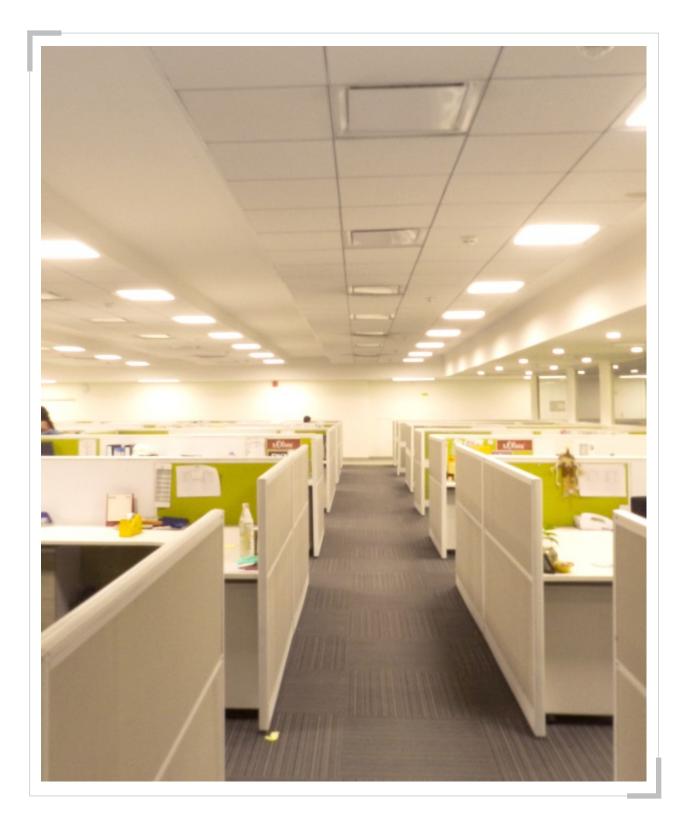



GLACE PEARL

Recessed LED luminaire combines an aesthetically pleasing design with class leading photometrics. This high efficient decorative module boast of extruded matt serrated glare control PMMA diffuser and is suitable for 600x600 Grid ceilings



Office Luminaires

| Product | Color Temperature | Lamp | Watt/Mtr | MRP |
|----------|-------------------|------|----------|------|
| LER 3145 | 3000K/4000K/6000K | LED | 45 | 4350 |

DESIGN REGISTERED

MODENA

NAM IN A

LED Recessed grid - ceiling luminaire, suitable for 600 x 600 module and is enclosed with high efficient flat PMMA low glare diffuser.



| Product | Color Temperature | Lamp | Watt/Mtr MRP |
|----------|-------------------|------|--------------|
| LER 2636 | 3000K/4000K/6000K | LED | 36 3950 |
| LER 2642 | 3000K/4000K/6000K | LED | 42 4450 |



MODENA 1/4

LED ceiling luminaire 1x4 suitable for recessed or suspended application with uniform illumination & higher efficiency.

| - Andrew Area | | |
|---------------|--|--|
| | | |

| Product | Color Temperature | Lamp | Watt/Mtr | MRP |
|----------|-------------------|------|----------|------|
| LER 1240 | 3000K/4000K/6000K | LED | 40 | 4875 |




MOON LIGHT

Recessed LED 2x2 luminaire made up of extruded aluminium to give a full glow effect with PMMA low glare diffuser and high efficient LED.

| 1 | / |
|---|---|
| | |
| | |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LML 6045 | 3000K/4000K/6000K | LED | 45 | 4850 |



Office

MOON LIGHT LINEAR 1

Recessed LED 1x4 luminaire made up of extruded aluminium to give a full glow effect with PMMA low glare diffuser and high efficient LED.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LML 6050 | 3000K/4000K/6000K | LED | 50 | 5150 |

| | 1195 | |
|-----|------|----|
| 295 | | |
| | | |
| | | 65 |


11249/ 10

MOON LIGHT LINEAR 2

Recessed LED 2x4 luminaire made up of extruded aluminium to give a full glow effect with PMMA low glare diffuser and high efficient LED.



| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LML 6080 | 3000K/4000K/6000K | LED | 80 | 9650 |




PENTO



| Product | Color Temperature | Lamp | Watt/Mtr MRP |
|----------|-------------------|------|--------------|
| LER 2518 | 4000K/6000K | LED | 18 2350 |

LED Recessed luminaire, suitable for 300 x 300 module with

high efficient flat PMMA low glare diffuser.




280x280

PENTO 2

LED Recessed luminaire, suitable for 300 x 300 module with high efficient flat PMMA low glare diffuser.



| Product | Color Temperature | Lamp | Watt/Mtr | MRP |
|----------|-------------------|------|----------|------|
| LER 2525 | 4000K/6000K | LED | 24 | 2650 |




FLARE



This low profile surface mounted luminaire utilizes a one piece housing, and temper - resistant fasteners to maximize impact resistance. This LED luminaire encompasses high efficiency PMMA low glare diffuser mounted on serrated aluminium frame.

| Product | Color Temperature | Lamp | Watt/Mtr | MRP |
|----------|-------------------|------|----------|------|
| LES 4245 | 4000K/6000K | LED | 45 | 4850 |
| | | | | |




Office Luminaires

MENTO



This surface mounted decorative luminaire is a fully assembled, one piece surface lighting system that provides and unobstructed, visually comfortable light. This LED luminaire produces excellent, uniform, low glare light mainly because of the use of high efficiency square shaped PMMA low glare diffuser.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LES 4218 | 4000K/6000K | LED | 18 | 2550 |




MENTO 2



This surface mounted decorative luminaire is a fully assembled, one piece surface lighting system that provides and unobstructed, visually comfortable light. This LED luminaire produces excellent, uniform, low glare light mainly because of the use of high efficiency PMMA low glare diffuser mounted on serrated aluminium frame.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LES 4224 | 4000K/6000K | LED | 24 | 2850 |



SLATE DIRECT

Office Suspended Luminaires

> A pendant luminaire made of extruted aluminium profile & high efficient diffuser for 100% direct light to give better distribution with high efficiency.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| ASD 1345 | 3000K/4000K/6000K | LED | 45 | 5450 |

| The MELLO Suspended provides exceptional aesthetics with |
|--|
| inconspicuous lighting. This unique and contemporary direct- |
| indirect suspended luminaire is made in CRCA and is enclosed |
| with PMMA optical diffuser for optimum light output. |
| |

| Product | Color Temperature | Lamp | Watt | MRP |
|---------|-------------------|------|------|-------|
| MEL 55 | 4000K/6000K | LED | 55 | 10850 |



A suspended LED 2x2 luminaire made up of extruded aluminium to give a full glow effect with low glare PMMA diffuser and high efficient LEDs.


| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LML 7045 | 3000K/4000K/6000K | LED | 45 | 5475 |

MOON LIGHT LINEAR 1 **SUSPENDED**

A suspended LED 1x4 luminaire made up of extruded aluminium to give a full glow effect with low glare PMMA diffuser and high efficient LEDs.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LML 7050 | 3000K/4000K/6000K | LED | 50 | 5675 |






65

1140 335 17









65






A suspended LED 2x4 luminaire made up of extruded aluminium to give a full glow effect with low glare PMMA diffuser and high efficient LEDs.

| | 1195 |
|-----|------|
| 595 | |
| | 65 |

Office Suspended

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-------|
| LML 7080 | 3000K/4000K/6000K | LED | 80 | 10800 |

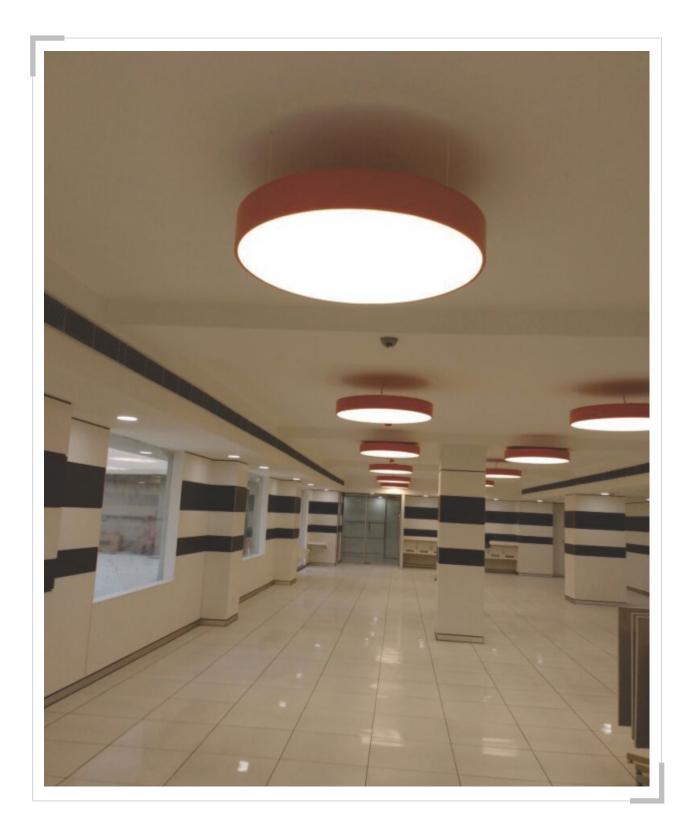

1249

Architectural Luminaires




STRAPLINE - 72 R

Well II

The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast and mounting clamps to be used in recessed application.

| Color Temperature | Lamp | Watt | MRP |
|-------------------|---|---|--|
| 3000K/4000K/6000K | LED | 20 | 6250 |
| 3000K/4000K/6000K | LED | 30 | 6450 |
| 3000K/4000K/6000K | LED | 40 | 12400 |
| 3000K/4000K/6000K | LED | 60 | 12900 |
| | 3000K/4000K/6000K 3000K/4000K/6000K 3000K/4000K/6000K | 3000K/4000K/6000K LED 3000K/4000K/6000K LED 3000K/4000K/6000K LED | 3000K/4000K/6000K LED 20 3000K/4000K/6000K LED 30 3000K/4000K/6000K LED 40 |




STRAPLINE - 72-S



The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast to be used in suspended/surface applications.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-------|
| LSL 7220 | 3000K/4000K/6000K | LED | 20 | 6350 |
| LSL 7230 | 3000K/4000K/6000K | LED | 30 | 6650 |
| LSL 7240 | 3000K/4000K/6000K | LED | 40 | 12500 |
| LSL 7260 | 3000K/4000K/6000K | LED | 60 | 13200 |




STRAPLINE - 50-S



The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast to be used in suspended/surface applications.


| Product | Color Temperature | Lamp | Watt | MRP |
|------------|-------------------|------|------|-------|
| LSL-S 5020 | 3000K/4000K/6000K | LED | 20 | 6175 |
| LSL-S 5030 | 3000K/4000K/6000K | LED | 30 | 6375 |
| LSL-S 5040 | 3000K/4000K/6000K | LED | 40 | 11950 |
| LSL-S 5060 | 3000K/4000K/6000K | LED | 60 | 12500 |



STRAPLINE - 50 R

The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast to be used in recessed applications.

| Product | Color Temperature | Lamp | Watt |
|------------|-------------------|------|------|
| LSL-R 5020 | 3000K/4000K/6000K | LED | 20 |
| LSL-R 5030 | 3000K/4000K/6000K | LED | 30 |
| LSL-R 5040 | 3000K/4000K/6000K | LED | 40 |
| LSL-R 5060 | 3000K/4000K/6000K | LED | 60 |
| | | | |



MRP

6150 6450

12300

12800

Page 31


Architectural[®] Luminaires

STRAPLINE - 50

UP & DOWN



| Product | Color Temperature | Lamp | Watt | MRP |
|------------|-------------------|------|------|------|
| LSL-R 5030 | 3000K/4000K/6000K | LED | 30 | 7850 |
| LSL-R 5040 | 3000K/4000K/6000K | LED | 40 | 8250 |





OLIVE



A perfect combination of functionality and design, Olive is designed in an all rounder shape giving a clean aesthetic to a space. A newly designed Smart lighting is now on board, revealing a clean accessible revolutionary design perfectly blending in any space. The housing functions to support other components of the luminaire and provides a mounting mechanism for the attachment of the luminaire. The evolution in commercial lighting has be all directions ; along wit performance and functional

| een characterized by progress in | | | |
|----------------------------------|------|------|-----|
| h improvements in luminous | | | |
| efficiency. | | | |
| ature | Lamp | Watt | MRP |








Suspended / Surface LED luminaire for single use or continuous line, extruded aluminum body, direct-indirect PMMA optical system made single piece extruded high efficient UV protected click fit diffuser for uniform illumination & maximum visual comfort. Luminaire is protected mounting with a steel cord.

LED module's are mounted on thick aluminum tray for superior heat dissipation, provided with electronic driver.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LSO 5020 | 3000K/4000K/6000K | LED | 20 | 8650 |
| LSO 5030 | 3000K/4000K/6000K | LED | 30 | 9250 |



STRAPLINE - T I FD

Luminaires compatible with armstrong TECHZONE ceiling. Recessed single length individual luminaire, aluminium extruded natural anodised housing. with matt finish extruded PMMA opal diffuser with uniform light distribution.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LSL 8040 | 3000K/4000K/6000K | LED | 40 | 8850 |



1000/1200






PILL 400 SUSPENDED

A WAN IN I



Round CRCA Die formed housing with Opal PMMA diffuser. High efficient LEDs for uniform light distribution .

| Product | Color Temperature | Lamp | Watt | MRP |
|------------|-------------------|------|------|------|
| APL-S 4130 | 3000K/4000K/6000K | LED | 30 | 7650 |




PILL 400 RECESSED



Round CRCA Die formed housing with Opal thermoformed PMMA diffuser. High efficient LEDs for uniform light distribution.

| Product | Color Temperature | Lamp | Watt | MRP |
|------------|-------------------|------|------|------|
| APL-R 4230 | 3000K/4000K/6000K | LED | 30 | 8450 |




PILL 500 SUSPENDED



Round CRCA Die formed housing with Opal PMMA diffuser. High efficient LEDs with mid power LEDs for uniform light distribution.


| Product | Color Temperature | Lamp | Watt | MRP |
|------------|-------------------|------|------|-------|
| APL-S 5145 | 3000K/4000K/6000K | LED | 45 | 10800 |



PILL 500 RECESSED



| Product | Color Temperature | Lamp | Watt | MRP |
|------------|-------------------|------|------|-------|
| APL-R 5245 | 3000K/4000K/6000K | LED | 45 | 12500 |




Architectural Luminaires

PILL 600 SUSPENDED



Round CRCA Die formed housing with Opal PMMA diffuser. High efficient LEDs for uniform light distribution.

| Product | Color Temperature | Lamp | Watt | MRP |
|------------|-------------------|------|------|-------|
| APL-S 6156 | 3000K/4000K/6000K | LED | 56 | 14500 |




NEW I

PILL 600 RECESSED



Round CRCA Die formed housing with Opal thermoformed PMMA diffuser. High efficient LEDs for uniform light distribution.

| Product | Color Temperature | Lamp | Watt | MRP |
|------------|-------------------|------|------|-------|
| APL-R 6256 | 3000K/4000K/6000K | LED | 56 | 17800 |




PILL 900 SUSPENDED




Round CRCA Die formed housing with Opal PMMA diffuser. High efficient LEDs for uniform light distribution.

| Product | Color Temperature | Lamp | Watt | MRP |
|------------|-------------------|------|------|-------|
| APL-S 8180 | 3000K/4000K/6000K | LED | 80 | 21500 |



PILL 1200 SUSPENDED Round CRCA Die formed housing with Opal PMMA diffuser. High efficient LEDs for uniform light distribution.

| Product | Color Temperature | Lamp | Watt | MRP |
|-------------|-------------------|------|------|-------|
| APL-S 81100 | 3000K/4000K/6000K | LED | 100 | 34800 |






RIPPLE

AL WAR IN A



Round CRCA Die formed housing with Opal PMMA diffuser. High efficient LEDs for uniform light distribution .

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-------|
| ARL 6030 | 3000K/4000K/6000K | LED | 30 | 23500 |






RIPPLE



Round CRCA Die formed housing with Opal PMMA diffuser. High efficient LEDs for uniform light distribution .

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-------|
| ARL 6055 | 3000K/4000K/6000K | LED | 55 | 33750 |




RIPPLE



Round CRCA Die formed housing with Opal PMMA diffuser. High efficient LEDs for uniform light distribution .

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|---------------------|
| ARL 6080 | 3000K/4000K/6000K | LED | 80 | Price on Request |






HEXO 400



CRCA Die formed housing in hexagon shape with Opal PMMA diffuser. High efficient LEDs for uniform light distribution.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|---------------------|
| AHL 4040 | 3000K/4000K/6000K | LED | 40 | Price on Request |



Architectural Luminaires




TRIO



CRCA Die formed housing in triangle formation with Opal PMMA diffuser. High efficient LEDs for uniform light distribution.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|---------------------|
| ATL 3030 | 3000K/4000K/6000K | LED | 30 | Price on Request |










AL WAR IN IS



A decorative luminaire with high efficient COB for uniform light distribution. The fixture is available in different colors options.

| Product | Color Temperature | Lamp | Watt | MRP |
|---------|-------------------|------|------|------|
| LB 324 | 3000K/4000K/5700K | LED | 24 | 6250 |




LOW BAY (SMALL)



A decorative luminaire with high efficient COB for uniform light distribution. The fixture is available in different colors options.

| Product | Color Temperature | Lamp | Watt | MRP |
|---------|-------------------|------|------|------|
| LB 324 | 3000K/4000K/5700K | LED | 24 | 5475 |




D LITE 600



The decorative luminaire suitable for LED bulbs available in different color options.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|---------|------|
| LDTE 600 | 3000K/6000K | LED | 9,12,15 | 6250 |

*LED bulb cost extra as applicable




D LITE 425



The decorative luminaire suitable for LED bulbs available in different color options.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|---------|------|
| LDTE 425 | 3000K/6000K | LED | 9,12,15 | 3850 |

*LED bulb cost extra as applicable



Decorative V Luminaires


D LITE 380



The decorative luminaire suitable for LED bulbs available in different color options.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|---------|------|
| LDTE 380 | 3000K/6000K | LED | 9,12,15 | 2275 |

*LED bulb cost extra as applicable



NAM IV

D LITE 300


The decorative luminaire suitable for LED bulbs available in different color options.



 Product
 Color Temperature
 Lamp
 Watt
 MRP

 LDTE 300
 3000K/6000K
 LED
 9,12,15
 1875

 *LED bulb cost extra as applicable




ZETA 1



The decorative luminaire suitable for LED bulbs available in different color options.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------------|--------------------------|------|---------|------|
| LZTE 3010 | 3000K/6000K | LED | 9,12,15 | 4250 |
| *I FD bulb cos | st extra as applicable | | | |



ZETA 2


The decorative luminaire suitable for LED bulbs available in different color options.



 Product
 Color Temperature
 Lamp
 Watt
 MRP

 LZTE 3020
 3000K/6000K
 LED
 9,12,15
 2975

*LED bulb cost extra as applicable



ZETA 3


A WAY IN IN



The decorative luminaire suitable for LED bulbs available in different color options.

| Product | Color Temperature | Lamp | Watt | MRP |
|-----------|-------------------|------|---------|------|
| LZTE 3030 | 3000K/6000K | LED | 9,12,15 | 2075 |

*LED bulb cost extra as applicable




Decorative Luminaires

MOLE

The decorative luminaire suitable for LED bulbs available in different color options.

| Product | Color Temperature | Lamp | Watt | MRP |
|---------------|------------------------|------|---------|------|
| LMOL | 3000K/6000K | LED | 9,12,15 | 1850 |
| *LED bulb cos | st extra as applicable | | | |




TOPE




The decorative luminaire suitable for LED bulbs available in different color options.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|---------|------|
| LTOP 265 | 3000K/6000K | LED | 9,12,15 | 4450 |

*LED bulb cost extra as applicable





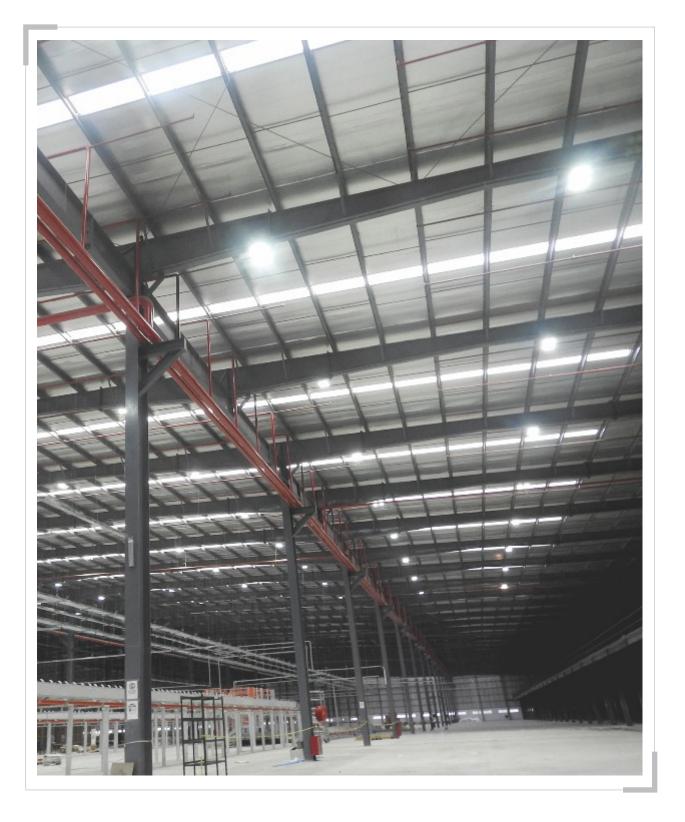





1240

245

56

2

1 X 18W

2 X 18W

73

78

DURA W/O REFLECTOR WITH LED TUBE

ant coo

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LIF 3118 | 6000K | LED | 1x18 | 1050 |
| LIF 3228 | 6000K | LED | 2x18 | 1650 |

source for long life.

The Dura series brings the advantages of energy efficient and controllable lighting for industrial application with LED lamp

| REFLECTOR | FOR |
|-----------|-----|
| DURA | |

The Dura reflector boast of powder coated CRCA Sheet metal reflector with excellent photometric performance

| 1.1 | |
|-----|--|
| 2 | |

| Product | Watt | MRP |
|----------|------|-----|
| LIF 1118 | 1x18 | 500 |
| LIF 1218 | 2x18 | 550 |



Outdoor& Facade


PICTOR

Well IV



An ultra compact, IP 66, LED light luminaire. Its corrosion proof, die cast aluminium composite construction makes it ideal for the harshest corrosive environment. Spike available to ease the installation.

| Product | Color Temperature | Lamp | Watt | MRP |
|---------|-------------------|------|------|------|
| LSO 303 | 3000K | LED | 3 | 1775 |




Landscape

PICTOR



An ultra compact, IP 66, LED light luminaire. Its corrosion proof, die cast aluminium composite construction makes it ideal for the harshest corrosive environment. Spike available to ease the installation.

| Product | Color Temperature | Lamp | Watt | MRP |
|---------|--------------------------|------|------|------|
| LSO 307 | 3000K | LED | 7 | 4650 |
| LSO 310 | 3000K | LED | 10 | 4950 |



UDETECTOR 3



IP 68 LED waterproof underwater spotlight made of die-cast stainless steel housing & cover offering 25 optics angle.

| Product | Color Temperature | Lamp | Watt | MRP |
|---------|-------------------|------|------|-------|
| UDT 003 | 3000K | LED | 3 | 13500 |



KUBE



Wall mounted IP65 luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminiare is available in different beam angles with toughened glass.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LSO 3207 | 3000K/4000K/6000K | LED | 7 | 3975 |
| LSO 3212 | 3000K/4000K/6000K | LED | 12 | 4275 |
| LSO 3215 | 3000K/4000K/6000K | LED | 15 | 4675 |






Landscape

KUBE

UP & DOWN

Wall mounted IP65 up-down luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminiare is available in different beam angles with toughened glass.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LSO 3314 | 3000K/4000K/6000K | LED | 2x7 | 4675 |







Wall mounted IP65 luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminiare is available in different beam angles with toughened glass.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LSO 3224 | 3000K/4000K/6000K | LED | 2x12 | 5275 |
| LSO 3230 | 3000K/4000K/6000K | LED | 2x15 | 5890 |



KUBE SURFACE



Ceiling mounted IP65 luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminiare is available in different beam angles with toughened glass.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LSO 3307 | 3000K/4000K/6000K | LED | 7 | 4175 |
| LSO 3312 | 3000K/4000K/6000K | LED | 12 | 4450 |
| LSO 3315 | 3000K/4000K/6000K | LED | 15 | 4775 |




OREON



Wall mounted IP65 luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminiare is available in different beam angles with toughened glass.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LCO 4407 | 3000K/4000K/6000K | LED | 7 | 4075 |
| LCO 4412 | 3000K/4000K/6000K | LED | 12 | 4375 |
| LCO 4415 | 3000K/4000K/6000K | LED | 15 | 4850 |



Landscape Luminaires



Wall mounted IP65 up-down luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminiare is available in different beam angles with toughened glass.


| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LCO 4414 | 3000K/4000K/6000K | LED | 2x7 | 4775 |
| LCO 4424 | 3000K/4000K/6000K | LED | 2x12 | 5650 |
| LCO 4430 | 3000K/4000K/6000K | LED | 2x15 | 6450 |

OREON SURFACE



| Ceiling mounted IP65 luminaire made of high grade |
|--|
| aluminium extrusion & die cast aluminium heatsink for |
| effective heat dissipation with high efficient COB for better |
| output. The luminiare is available in different beam angles with |
| toughened glass. |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LCO 4307 | 3000K/4000K/6000K | LED | 7 | 4175 |
| LCO 4312 | 3000K/4000K/6000K | LED | 12 | 4490 |
| LCO 4315 | 3000K/4000K/6000K | LED | 15 | 4975 |




SIA (BULK HEAD)

IP 65 SIA (bulk head) light is integrated with high efficient LEDs with milky diffuser covering. The fixture has integrated driver and is easy on maintenance.

| 0.00 | | | and the second | |
|------|---|---|----------------|--|
| - | | _ | - | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | _ | | | |
| | | | | |
| | _ | | | |
| | | | | |
| | | | | |
| | _ | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| - | | | | |

| Product | Color Temperature | Lamp | Watt | MRP |
|---------|--------------------------|------|------|------|
| LBH 12 | 3000K/4000K/6000K | LED | 12 | 1450 |




VOLA



IP 65 Die Cast Aluminum Housing. Horizontal vertical scoop Step Light designed for safety and style on stairways, patios, decks, balcony areas, walkways and building perimeters with separate GI box enclosure & integrated driver.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LOD 2009 | 3000K | LED | 9 | 2650 |



Landscape

LOCUS 1

IP 65 designer step light with integrated high efficient LED designed for safety & style for stairways, patios, decks, balcony areas & walkways.

| Product | Color Temperature | Lamp | Watt | MRP | |
|----------|-------------------|------|------|------|--|
| LOD 3004 | 3000K/4000K/6000K | LED | 4 | 1475 | |



NAM IN




LOCUS 2

IP 65 designer step light with integrated high efficient LED designed for safety & style for stairways, patios, decks, balcony areas & walkways.

| - | 10 Mar 10 Mar 10 |
|-----|------------------|
| 100 | |
| | |
| | |
| | COLUMN A |
| | - |
| _ | |
| | |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LOD 3006 | 3000K/4000K/6000K | LED | 6 | 1625 |






LOCUS 3



| IP | 65 | desi | gnei | step | ligh | t with | inte | egrated | hig | h efficie | ent | led |
|----|------|-------|------|--------|------|--------|------|---------|-----|-----------|-----|------|
| de | esig | ned | for | safety | у & | style | for | stairwa | ys, | patios, | de | cks, |
| b | alco | ony a | reas | & wall | kway | ys. | | | | | | |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LOD 3009 | 3000K/4000K/6000K | LED | 9 | 4175 |





VOLANS



IP 67 LED In-ground uplight in die-cast aluminium housing and stainless steel cover with integrated driver.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LOD 3001 | 3000K | LED | 1 | 2750 |
| LOD 3003 | 3000K | LED | 3 | 3650 |



Ø38

Ø38






ELAVA

West In



IP 67 in ground LED luminaire die cast housing stainless steel cover, anti-corrosion resistant, tempered clear glass with optical lens & Integrated driver.

| Product | Color Temperature | Lamp | Watt | MRP |
|-----------|--------------------------|------|------|------|
| LOD 44503 | 3000K/4000K/6000K | LED | 3 | 2650 |
| LOD 44506 | 3000K/4000K/6000K | LED | 6 | 4250 |
| LOD 44509 | 3000K/4000K/6000K | LED | 9 | 4650 |




ELAVA

IP 67 in ground LED luminaire die cast housing stainless steel cover, anti-corrosion resistant, tempered clear glass with optical lens & Integrated driver.



| Product | Color Temperature | Lamp | Watt | MRP |
|-----------|-------------------|------|------|------|
| LOD 44512 | 3000K/4000K/6000K | LED | 12 | 5475 |
| LOD 44515 | 3000K/4000K/6000K | LED | 15 | 5890 |




TRAPO



IP 65 outdoor lighting bollard made with extruded aluminium and die-cast aluminium housing. Simplified geometric form that will both compliment and blend with a variety of architectural settings. Rugged in design and functional in performance.

| Product | Color Temperature | Lamp | Watt | MRP |
|-------------|-------------------|------|------|------|
| LTR 1100-08 | 3000K | LED | 8 | 4875 |




796

TRAPO D



IP 65 outdoor lighting bollard with both side lighting option made with extruded aluminium and die cast aluminium housing. Simplified geometric form that will both compliment and blend with a variety of architectural settings. Rugged in design and functional in performance.

| Product | Color Temperature | Lamp | Watt | MRP |
|-------------|-------------------|------|------|------|
| LTR 1150-16 | 3000K | LED | 2x8 | 5850 |



TRAPO MINI

⁷ Landscape Luminaires

Π

IP 65 outdoor lighting mini bollard made with extruded aluminium and die cast aluminium housing. Simplified geometric form that will both compliment and blend with a variety of architectural settings. Rugged in design and functional in performance.


| Product | Color Temperature | Lamp | Watt | MRP |
|---------------|-------------------|------|------|------|
| LTR-M 1100-06 | 3000K | LED | 6 | 4075 |

LITTA



IP 54 LED bollard for outdoor illumination made in extruded aluminium with UV stabilized opal PMMA diffuser.

| Product | Color Temperature | Lamp | Watt | MRP |
|-------------|-------------------|------|------|------|
| LCO 1450-09 | 3000K | LED | 9 | 5450 |
| | | | | |
| | | | | |
| | | | | |
| | | | | |




NELL BOLLARD




Outdoor IP65 Rated bollard for landscape lighting application. Luminaire made of high grade corrosion resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser and stainless steel screws.

| Product | Lamp | Lamp(S) | Watt | MRP |
|--------------|------|---------|------|-------|
| LCO 1200-115 | LED | 1 | 15 | 10500 |



IP 65 LED bollard is suitable for landscape stabilized lighting applications. Luminaire is made of high grade corrosion resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

| Product | Color Temperature | Lamp | Watt | MRP |
|--------------|-------------------|------|------|------|
| LCR 1100-112 | 3000K/4000K/6000K | LED | 12 | 8475 |
| LCR 1100-115 | 3000K/4000K/6000K | LED | 15 | 9500 |




BARREL

AL WAN IN I

The BARRELbollard round cylindrical shape outdoor IP66 rated Luminaire is made of MS tubular sections Powder Coated with Chemically polished & electrochemically anodised aluminium antiglare reflector covered with clear 1Pcs. PMMA diffuser.

| Product | Color Temperature | Lamp | Watt | MRP |
|--------------|-------------------|------|------|------|
| LBL 1000-010 | 3000K/4000K/6000K | LED | 10 | 8250 |




Landscape

STEELO

The STEELO bollard round cylindrical shape outdoor IP66 rated Luminaire is made of MS tubular sections Powder Coated with Chemically polished & White powder coated aluminium reflector covered with clear 1Pcs. PMMA diffuser.

| Product | Color Temperature | Lamp | Watt | MRP |
|--------------|-------------------|------|------|------|
| LSL 1300-012 | 3000K/4000K/6000K | LED | 12 | 7850 |



Page 49

Post Tóp

RING



IP 66 LED post top lights for outdoor illumination made in spun aluminium housing of high purity sheet electrochemically polished & anodized with deep drawn POT optics.

| Product | Color Temperature | Lamp | Watt | MRP |
|--------------|-------------------|------|------|-------|
| LPT 3400-030 | 3000K/4000K/6000K | LED | 30 | 24500 |
| LPT 3400-060 | 3000K/4000K/6000K | LED | 60 | 28500 |



NAM IN 18

VENUS



IP 66 LED post top light for outdoor illumination made in die cast spun aluminium housing with ribs. High purity sheet electrochemically polished and anodized with UV stabilized clear PMMA diffuser.

| Product | Color Temperature | Lamp | Watt | MRP |
|--------------|-------------------|------|------|-------|
| LPT 3200-030 | 3000K/4000K/6000K | LED | 30 | 18800 |
| LPT 3200-060 | 3000K/4000K/6000K | LED | 60 | 20500 |




PLUTO



IP 66 LED post top lights for outdoor illumination made in die cast spun aluminium housing with high purity sheet electrochemically polished and anodized with UV stabilized clear PMMA diffuser.

| Product | Color Temperature | Lamp | Watt | MRP |
|--------------|-------------------|------|------|-------|
| LPT 3000-030 | 3000K/4000K/6000K | LED | 30 | 16500 |
| LPT 3000-060 | 3000K/4000K/6000K | LED | 60 | 19500 |




ZELLA



IP 66 LED post top lights for outdoor illumination made out of aluminium alloy with die cast process . Powder coated finish with clear diffuser.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|-------|------|------|
| LOZ 3040 | 3000K/4000K/6000K | LED . | 40 | 7850 |



D 50

Outdoor Luminaires

QUADRA FLOOD 3

QUADRA

FLOOD 4

NAM IN LA



IP 66 high power LED flood light with lens made in Die cast Aluminium, powered with high efficacy high output LED chips and toughened glass. Control gear in separate aluminium extrusion for excellent thermal management.

| Product | Color Temperature | Lamp | Watt | MRP |
|-----------|-------------------|------|------|-------|
| LOD 30120 | 3000K/4000K/6000K | LED | 120 | 14800 |
| LOD 30140 | 3000K/4000K/6000K | LED | 140 | 16500 |

IP 66 high power LED flood light with lens made in Die cast

Aluminium, powered with high efficacy high output LED chips

and toughened glass. Control gear in separate aluminium

Lamp

Watt

160

MRP

18500


extrusion for excellent thermal management.

Color Temperature

3000K/4000K/6000K LED


Product

LOD 30160



AMMMM Prest view Stabil 11


ORKUS 20



|) |
|---|
| |
| |

| and lenses to | give the best output. | | | |
|---------------|-----------------------|------|------|-----|
| Product | Color Temperature | Lamp | Watt | MRP |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LOD 9120 | 6000K | LED | 20 | 2650 |




ORKUS 30/40



IP 65 LED street light with high pressure aluminum die cast body and toughened glass. Powered with high efficacy LED chips and lenses to give the best output.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LOD 9130 | 6000K | LED | 30 | 3450 |
| LOD 9140 | 6000K | LED | 40 | 3950 |








IP 65 LED street light with high pressure aluminum die cast body and toughened glass. Powered with high efficacy LED chips and lenses to give the best output.

| 2.4 |
|----------|
| G |

 Product
 Color Temperature
 Lamp
 Watt
 MRP

 LOD 9165
 6000K
 LED
 65
 6450



11249/ 10

ORKUS 90/120




| and tougher | et light with high pressu ned glass. Powered wi give the best output. | | | |
|-------------|---|------|------|------|
| Product | Color Temperature | Lamp | Watt | MRP |
| LOD 9190 | 6000K | LED | 90 | 9275 |

LED

120

11500

LOD 91120 6000K




BENTO 20





| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|------|
| LRS 9920 | 6500K | LED | 20 | 2150 |




BENTO 30/40



IP 65 LED street light with high pressure aluminum die cast body and toughened glass. Powered with high efficacy LED chips to give the best output.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LOD 9930 | 6500K | LED | 30 | 2975 |
| LOD 9940 | 6500K | LED | 40 | 3375 |





rol I had

Product

LRS 9965

A NAM M



Lamp

LED

Watt


65

MRP

4875

Color Temperature

6500K




Outdoor Luminaires

POLARIS


Ip65 LED aesthetic design street light luminaire in high pressure aluminium die cast body, corrosion resistant, glass cover with driver.



| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LOD 6525 | 4000K/6000K | LED | 25 | 2975 |




LEDRA



| | 10 | / |
|---|--------|---|
| | | |
| | | |
| 2 | - mark | |
| | - | |

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-------|
| LED 7075 | 6000K | LED | 75 | 12800 |






LEDRA



IP 65 LED street light with high pressure aluminum die cast body and toughened glass. Powered with high efficacy LED chips and lenses to give the best output.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|-------|
| LED 7120 | 6000K | LED | 120 | 16800 |






Outdoor Luminaires

QUADRA



Ip66 high power LED streetlight with lens made in Die cast aluminium, powered with high efficacy high output LED chips and toughened glass. Control gear in separate aluminium extrusion for excellent thermal management. Mounting option in pole top / side entry.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|-------------------|------|------|------|
| LOD 7030 | 6000K | LED | 30 | 4850 |
| LOD 7045 | 6000K | LED | 45 | 5450 |




NAM IN 18

QUADRA-2



Ip66 high power LED streetlight with lens made in Die cast aluminium, powered with high efficacy high output LED chips and toughened glass. Control gear in separate aluminium extrusion for excellent thermal management. Mounting option in pole top / side entry.

| Product | Color Temperature | Lamp | Watt | MRP |
|----------|--------------------------|------|------|-------|
| LOD 7060 | 6000K | LED | 60 | 7950 |
| LOD 7090 | 6000K | LED | 90 | 10500 |





QUADRA-3



Ip66 high power LED streetlight with lens made in Die cast aluminium, powered with high efficacy high output LED chips and toughened glass. Control gear in separate aluminium extrusion for excellent thermal management. Mounting option in pole top / side entry.

| Product | Color Temperature | Lamp | Watt | MRP |
|-----------|-------------------|------|------|-------|
| LOD 70120 | 6000K | LED | 120 | 15200 |
| LOD 70140 | 6000K | LED | 140 | 18500 |




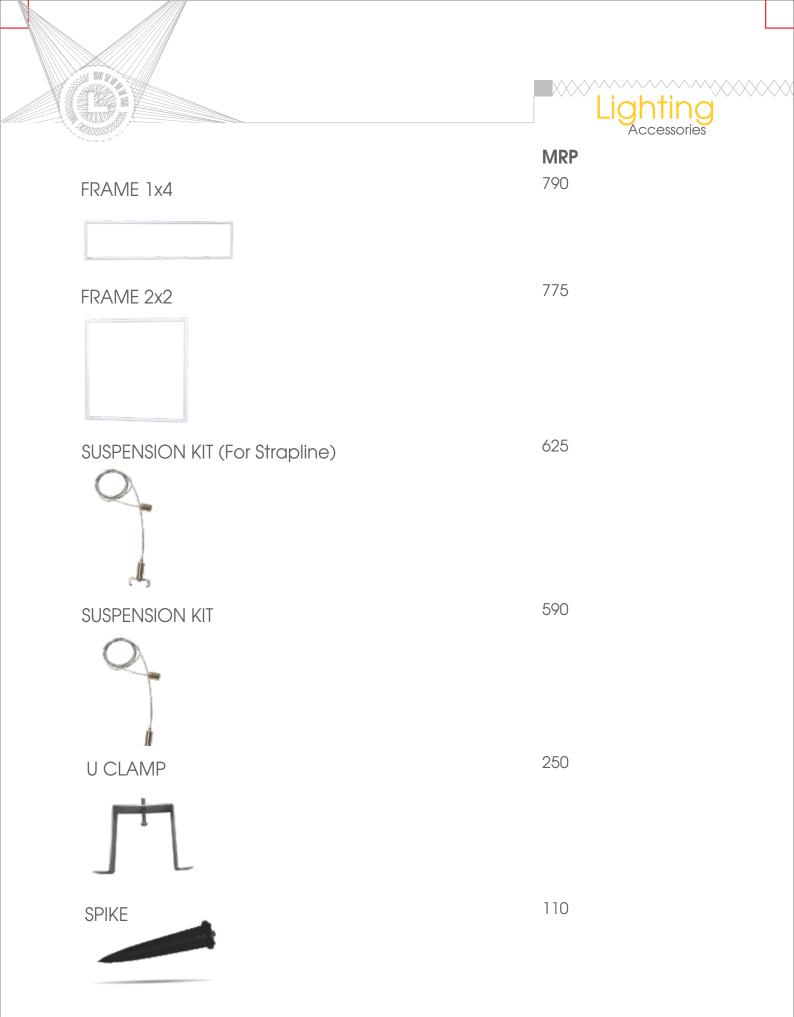

Page 55






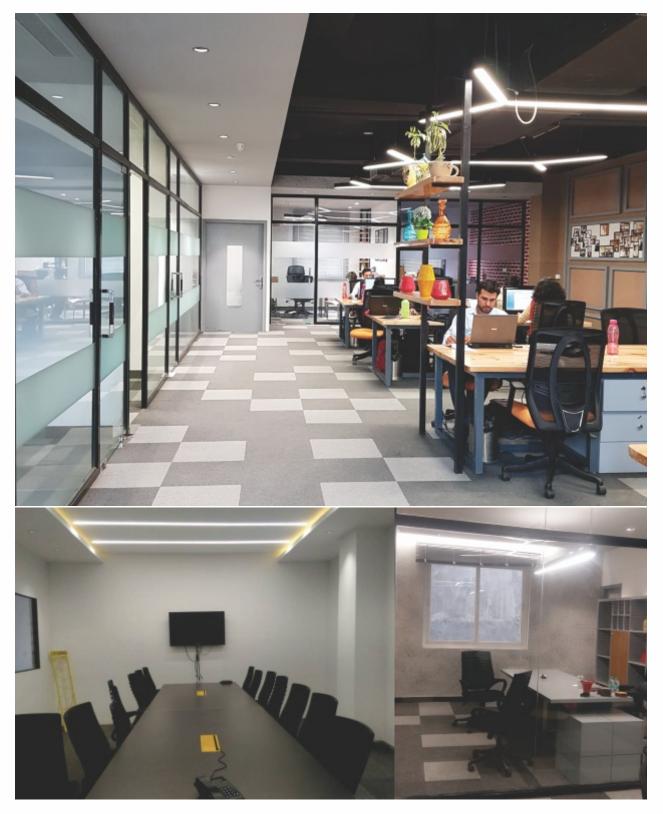


Page 56



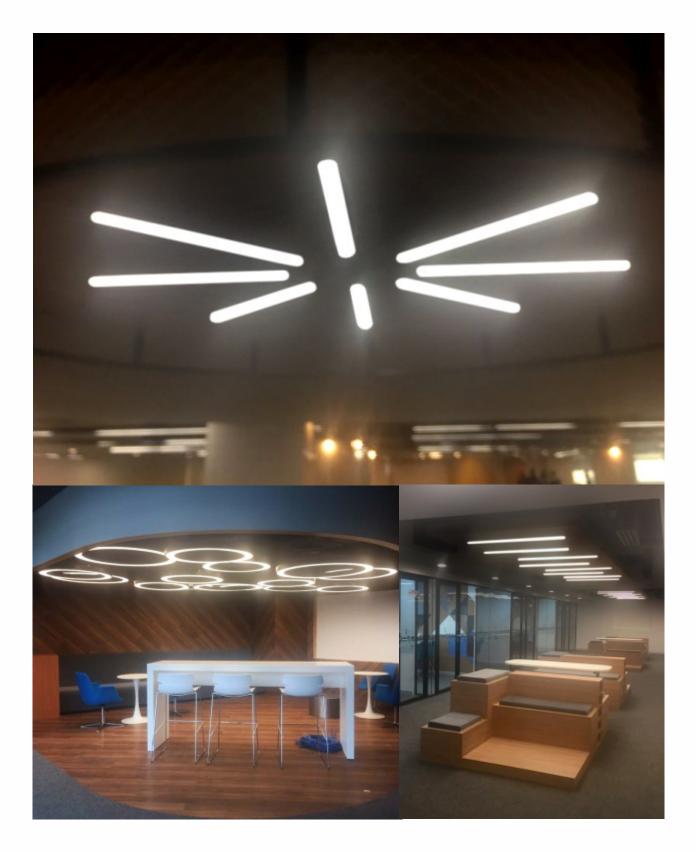






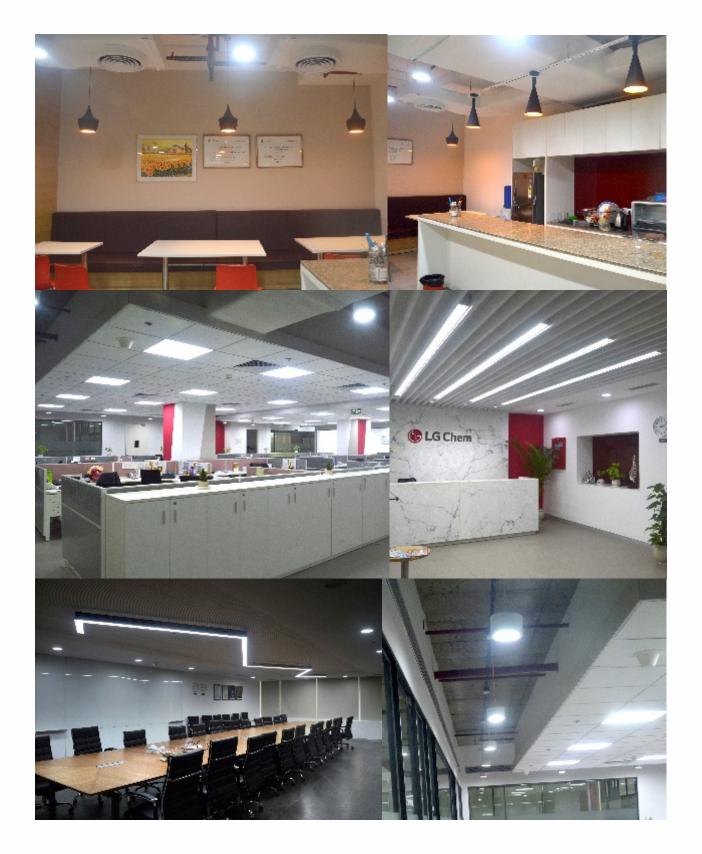

Page 58


Recent Installations

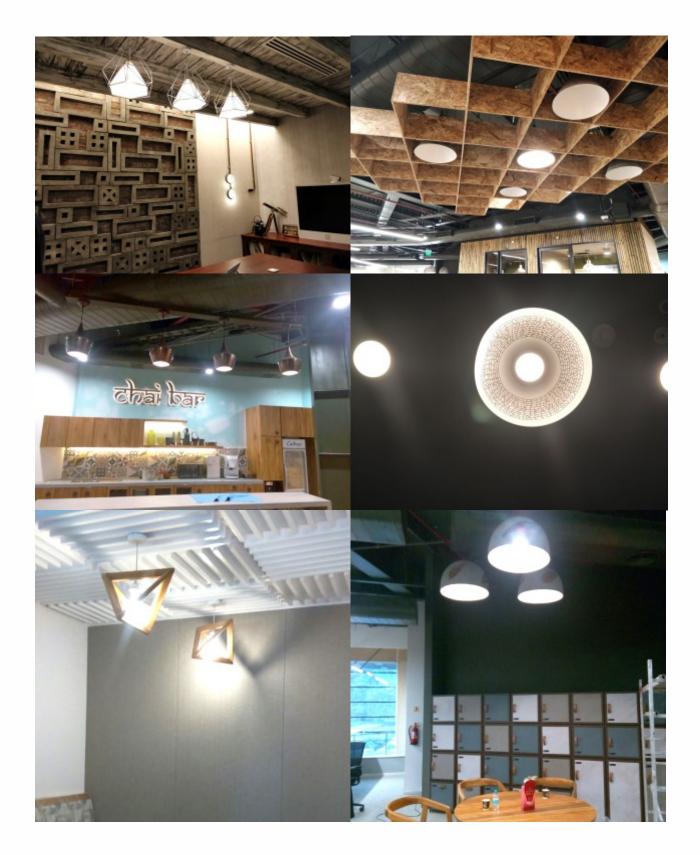

www.legerolighting.com






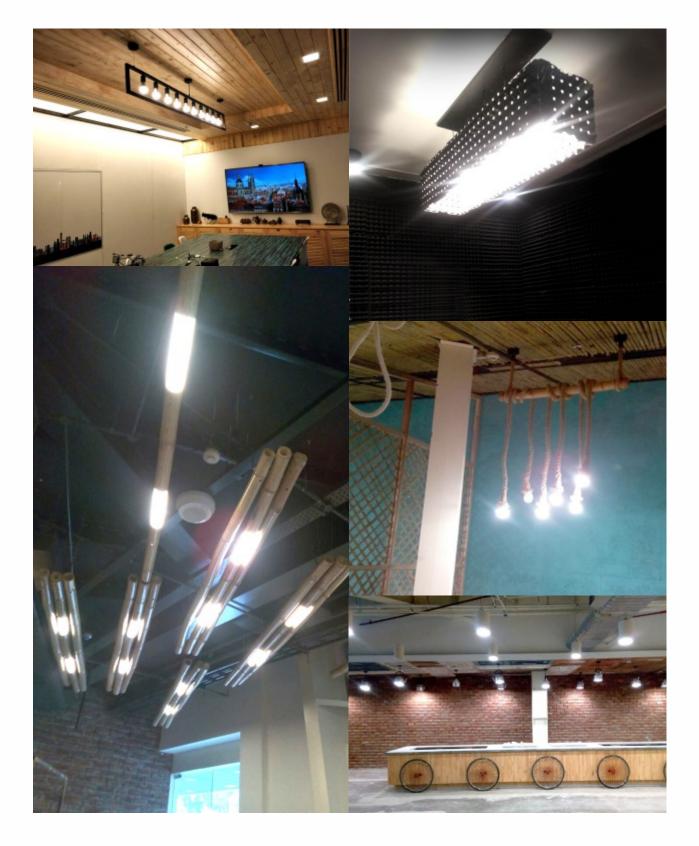

www.legerolighting.com

Page 60

Recent Installations

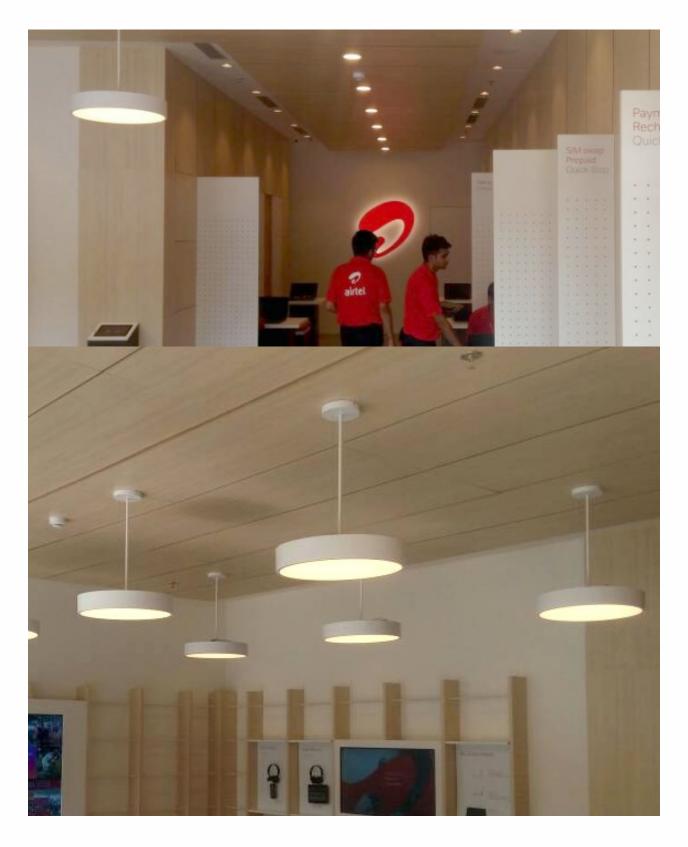


Page 61

A WH W






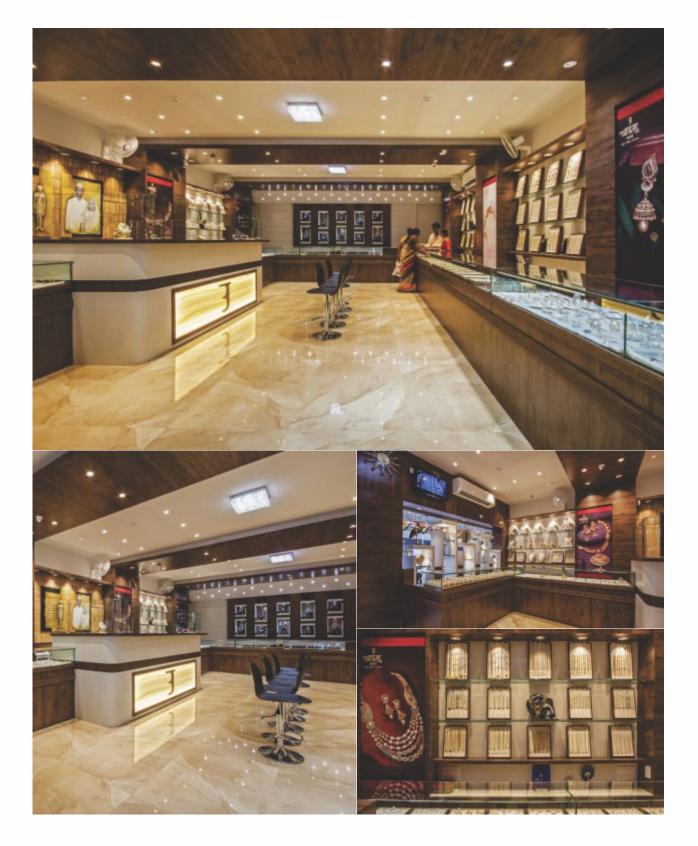

www.legerolighting.com

Page 62




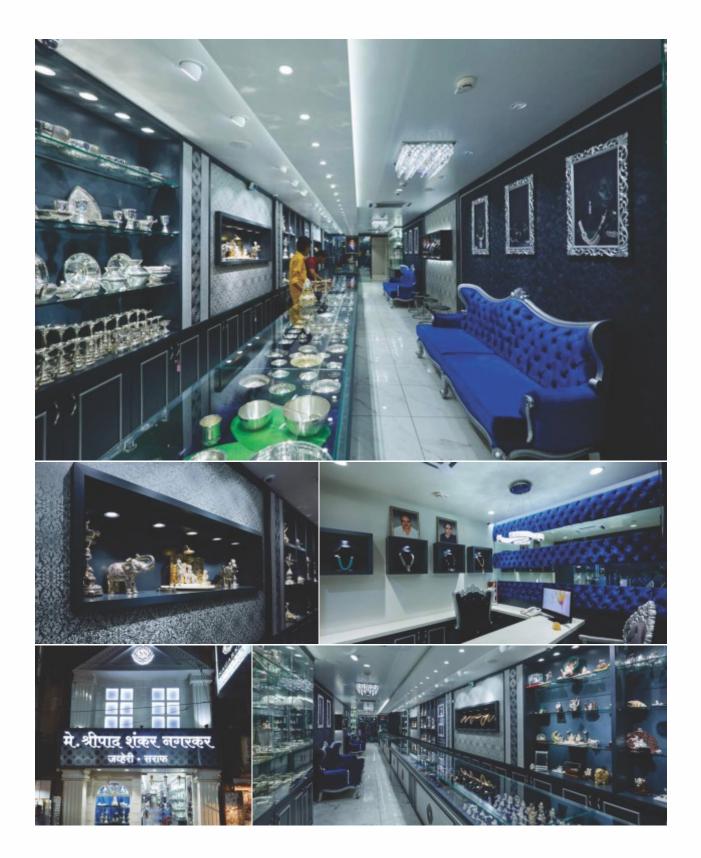

NAM M





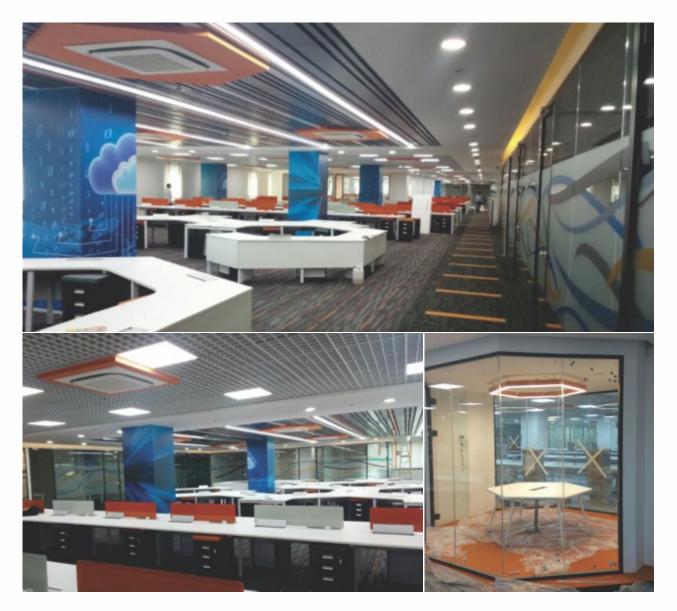


Recent Installations



www.legerolighting.com

Page 64


Recent Installations

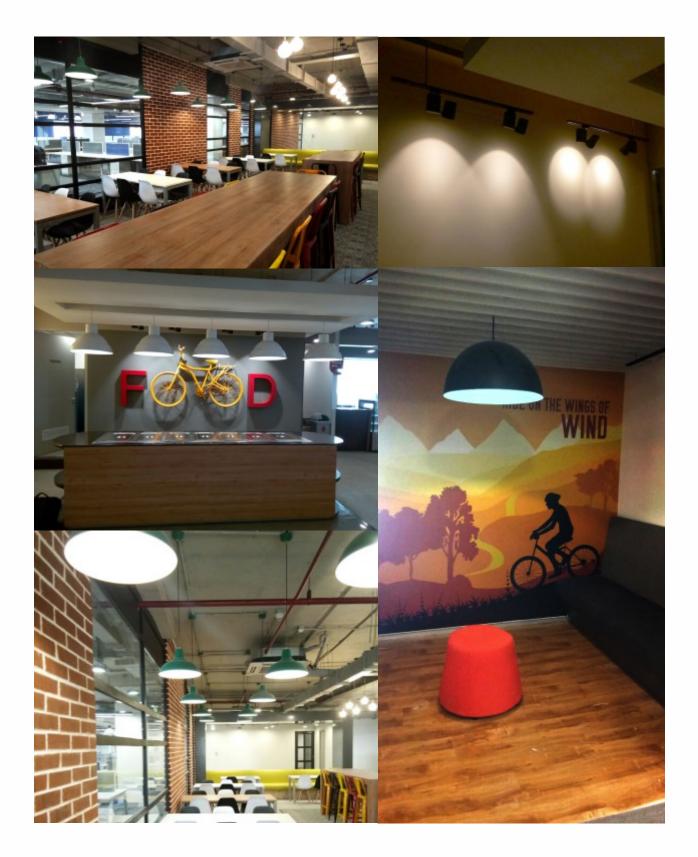

A WAN IN





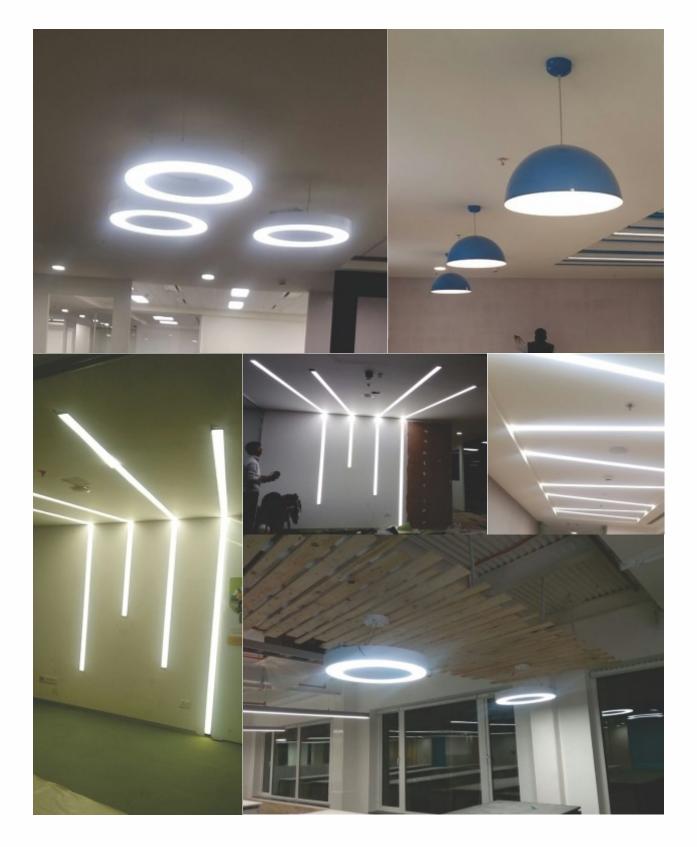

www.legerolighting.com

Page 66

NOTE:

All prices stated in the price list are in Indian Rupees (INR).

All prices stated in the price list are exclusive of the lamp(s) prices.



LEGERO LIGHTING INDIA PVT. LTD.

HEAD OFFICE DELHI NCR E-139, SECTOR 63,

NOIDA 201301 INDIA O. +91 120 4223894-95

info@legerolighting.com www.legerolighting.com

PUNE

SR. NO. 198, OPP. BHOSARI BRT BUS STOP, NASHIK-PUNE HIGHWAY, BHOSARI, PUNE - 411039, INDIA