



Commercial & Institutional Lighting Range Price List

w.e.f. May 2019

WIPRO LIGHTING

Since its inception, in 1991 Wipro Lighting has always been associated with new product innovations, unique lighting concepts and ideas.

With over 26 years of experience in commercial and institutional lighting, Wipro Lighting provides best-in-class LED lighting solutions. Today we have become synonymous with leadership in thought and reliability in the LED lighting industry. Partnering with customers, understanding their unique needs and developing world class LED lighting solutions that exceed their expectation, is what we believe in. Our advanced technologies, a comprehensive range of products for all commercial and institutional applications and strong channel network has made Wipro Lighting a preferred brand.

Right from high efficiency LED luminaires, lighting management systems, lighting for Green Buildings, high efficacy solutions for Industrial lighting, complete outdoor streetlighting and floodlighting range, complimented with an architectural outdoor range, Wipro Lighting stands to become an ideal lighting partner for all segments – Office, Industry, Pharmaceutical, Outdoor and Infrastructure projects.

Through our Internet of Lighting (IOL™) platform, Wipro lighting is a pioneer in providing comprehensive smart solution on the platform of IOL™. The company will be providing its application and solutions right from smart homes, smart building to smart cities under the brand Identity of IOL™.

We have a single minded focus on enhancing competitive advantage and thereby customer profitability at all times and our commitment to implement green lighting solutions, to create possibilities for a brighter future and a cleaner planet.



Driven by
Innovation,
leading through
Technology

The text is centered within a circular graphic that has a blue-to-purple gradient. The background of the entire page is white with several semi-transparent grey circles of varying sizes scattered across it. The three images mentioned are also circular and overlap each other and the text circle.

WIPRO LIGHTING



Section	Page No.
Modern Workspaces Recessed	05
Modern Workspaces Suspended	13
Commercial Interiors Downlighters	22
InSync™	28
Lighting Controls	32
Cleanroom & Sterile Areas	35
Industries	37
Outdoor Street Lighting	44
Outdoor Flood Lighting	48
Outdoor Landscape Lighting	51
Arcus	55
Solarise™	65
Cleanray	68
Terms and Conditions	77
Branch Offices	78

Recessed Luminaire Range

Modern Workspaces

Right light for
cheerful workspaces



Verge | LM 29



A versatile recessed bar suspended extruded aluminium luminaire with optically researched seamless HET polycarbonate diffuser with 10% uplight and 90% downlight. Uniquely designed product with consistency, uniformity and energy saving brings life to space.




Scan QR Code for more details

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LM29-451-XXX-57-XX	33W	5700	6,750
LM29-451-XXX-57RCC	33W	5700	7,350
LM29-451-XXX-57GRD	33W	5700	7,450

Also available in 4000K CCT, Analog/DALI dimmable and white Colour tunable. RCC suffix denotes suspension mounting for RCC ceiling. GRD suffix denotes suspension mounting for modular ceiling . Frame to be ordered separately for installation in POP/gypsum ceiling. Catalogue no. for frame is 9180P01089-LP Rs. 590.

Right Light for cheerful spaces

The 'Right Light' has an enlightening touch on the environment. It goes beyond just illumination to create a warm, comfortable and aesthetic ambiance that facilitates people to work effectively and live fully. The 'Right Light', one of the strongest sensory impression act as food to creativity, brings out the true potential in a space, facilitates the explosion of new ideas and encourages people to come out with winning-edge innovations; revolutionizing workplace environments.



Opus | LM38

Opus is progressive and modern in design with unique spherical drop down diffuser and surrounding light chamber. It subtly introduces a circular geometry and blends into the ceiling, making the environment cheerful and vibrant. It comes with the versatile lighting modes: direct, indirect and direct-indirect to suit different customer needs.



Scan QR Code for more details

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LM38-361-XXX-57-XX	28W	5700	9,850
LM38-461-XXX-57-XX	34W	5700	10,050
LM38-461-XXX-4057*	34W	4000 - 5700	13,390

*LM38-461-XXX-4057 is a unique luminaire which has dual Colour CCT available in a single luminaire. All variants available in 4000K CCT, Analog/DALI dimmable and white Colour tunable. Frame to be ordered separately for installation in POP/gypsum ceiling. Catalogue no. for frame is 9180P01089-LP Rs. 590.

NEW

Immaculate Plus | CRCO10

High efficient luminaire with 120 Lm/W efficacy helps in power saving and cost saving. Best-in-class LEDs consumes lesser energy reducing energy cost and proves to be an ideal solution for green buildings.



Scan QR Code
for more details

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
CRCO10R018HP57HE	18W	5700	6,050
CRCO10R024HP57HE	24W	5700	6,550
CRCO10R030HP57HE	30W	5700	7,050

Also available in 4000K CCT, Analog/DALI dimmable and white Colour tunable options.

Frame to be ordered separately for installation in POP/gypsum ceiling. Catalogue no. for frame is 9180P01089-LP Rs. 590.



Immaculate | CRCO10

Fully diffused recess/surface mounted with white powder coating and CRCA front cover, HET diffuser provides uniform illumination.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
CRCO10R038HP57G1	31W	5700	5,350
CRCO10S038HP57G1	31W	5700	5,650
CRCO10R036HP57G1	33W	5700	5,950
CRCO10S036HP57G1	33W	5700	6,490

Also available in 4000K CCT, Analog/DALI dimmable and white Colour tunable options.

Frame to be ordered separately for installation in POP/gypsum ceiling. Catalogue no. for frame is 9180P01089-LP Rs. 590.

NEW

Immaculate Smart | CRCO10

Smart lighting solution with inbuilt PIR sensor to control lighting as per occupancy and daylight leading to reduced power consumption and higher energy savings.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
CRCO10R030TL57UGSN	30W	5700	13,050

Also available in 4000K CCT.

Frame to be ordered separately for installation in POP/gypsum ceiling. Catalogue no. for frame is 9180P01089-LP Rs. 590.

NEW

Immaculate Soft | CRC010

Revolutionary anti-glare luminaire, Immaculate Soft with UGR<19 helps to eliminate the glare from the workplaces creating a visually pleasing and cheerful environment. Specially designed MPO* diffuser offers UGR<19 and high efficient LEDs offer uniform, optimum and glare free light output.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
CRC010R033HP57UGR	33W	5700	6,450

Also available in 4000K CCT.

Frame to be ordered separately for installation in POP/gypsum ceiling. Catalogue no. for frame is 9180P01089-LP Rs. 590.

*MPO - Micro precision optics.



Immaculate Trimless | CRC010

Immaculate Trimless with its unique frameless design blends with the ceiling minimizing the clutter, giving a distinct new look to the modern offices. Invisible over the grid only light is visible with grid as a border that creates a visually appealing yet non-intrusive environment.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
CRC010R038HP57SLAB	31W	5700	6,550

Also available in 4000K CCT.

Frame to be ordered separately for installation in POP/gypsum ceiling.

Catalogue no. for frame is 9180P01089 LP Rs. 590 | Cutout dimension: 608 mm x 608 mm.



Immaculate DD | LM24

Recessed mounted Luminaire with a unique drop down diffuser, compliant to LG7 guideline, leading to uniform lighting experience illuminating horizontal and vertical surfaces.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LM24-391-XXX-57-DD	31W	5700	6,550
LM24-421-XXX-57-DD	33W	5700	7,050

Also available in 4000K CCT.

Frame to be ordered separately for installation in POP/gypsum ceiling. Catalogue no. for frame is 9180P01089-LP Rs. 590.



Elate | CRC010

Recessed/Surfaced mounted LED luminaire with higher efficacy, full diffuser providing uniform light.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
CRC010R038HP57GL1	36W	5700	6,150
CRC010S038HP57GL1	36W	5700	6,350

R' represents recess and 'S' represents surface mounting. Also available in 4000K CCT.

Frame to be ordered separately for installation in POP/gypsum ceiling. Catalogue no. for frame is 9180P01089-LP Rs. 590.




Axeon Recess | LM34

Linear Lighting solution for contemporary workspaces. Extruded aluminium Housing with High Transmittivity HET Diffuser. High transmittivity HET diffuser for standalone and seamless end to end connectivity. Available in 4 feet and 8 feet variants.

Catalogue Reference No.	Wattage	Length (mm)	CCT (K)	LP ₹
LM34-251XXX-57RMG1	20W	1200	5700	7,890
LM34-251XX-57RMCG1	20W	1200	5700	7,990
LM34-401XXX-57RMG1	30W	1200	5700	8,390
LM34-401XX-57RMCG1	30W	1200	5700	8,490
LM34-501XXX-57RMG1	40W	2400	5700	14,190
LM34-501XX-57RMCG1	40W	2400	5700	14,290
LM34-801XXX-57RMG1	60W	2400	5700	16,650
LM34-801XX-57RMCG1	60W	2400	5700	16,750

Also available in 4000K CCT and Black housing Colour option



Axeon Trimless | LM34

Linear Lighting solution for contemporary workspaces. Extruded aluminium Housing with High Transmittivity HET Diffuser. Available in 4 feet and 8 feet.

Catalogue Reference No.	Wattage	Length (mm)	CCT (K)	LP ₹
LM34-251XXX-57TLG1	20W	1200	5700	8,390
LM34-501XXX-57TLG1	40W	2400	5700	14,190

Also available in 4000K CCT and Black housing Colour option



Aura Plus | CRCO13

Recessed/Surface mounted LED 4X1 luminaire, Full diffuser provides uniform light.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
CRCO13R038HP57G1	31W	5700	6,990
CRCO13S038HP57G1	31W	5700	7,490

Cutout dimensions: 1195mm x 295mm.

R' represents recess and 'S' represents surface mounting.

Frame to be ordered separately for installation in POP/gypsum ceiling. Also available in 4000K CCT.



Lineos | LM30

Linear recessed luminaire with satin finish PMMA diffuser offers bright and efficient illumination for standalone and seamless end to end connectivity. Available in both 4 feet and 8 feet variants.

Catalogue Reference No.	Wattage	Length (mm)	CCT (K)	LP ₹
LM30-211-XXX-57-G1	20W	1200	5700	6,150
LM30-211XXX-57G1CT	20W	1200	5700	6,250
LM30-401-XXX-57-G1	30W	1200	5700	7,150
LM30-401XXX-57G1CT	30W	1200	5700	7,250

Cutout dimensions: 1205 mm x 80 mm. Also available in 4000K CCT, Analog/DALI variants.



TZ | LM35

Recess mounted extruded aluminium housing, luminaire suitable for standalone & continuous TechZone ceiling. PMMA diffuser for uniform homogeneous light. Available in 4 feet and 8 feet configurations.

Catalogue Reference No.	Wattage	Length (mm)	CCT (K)	LP ₹
LM35-381-XXX-57-G1	28W	1200	5700	8,890
LM35-381-XXX-57-CT	28W	1200	5700	9,050
LM35-761-XXX-57-G1	56W	2400	5700	18,090
LM35-761-XXX-57-CT	56W	2400	5700	18,190

Also available in 4000K CCT and Analog/DALI dimmable.

NEW



TZ | LM35

Recess mounted MS housing, luminaire suitable for standalone & continuous TechZone ceiling. PMMA diffuser for uniform homogeneous light. Available in 4 feet and 8 feet configurations.

Catalogue Reference No.	Wattage	Length (mm)	CCT (K)	LP ₹
LM35-381-XXX-57-SH	29W	1200	5700	6,250
LM35-381-XXX57SHCT	29W	1200	5700	6,350
LM35-761-XXX-57-SH	58W	2400	5700	15,390
LM35-761-XXX57SHCT	58W	2400	5700	15,490

Also available in 4000K CCT and Analog/DALI dimmable.



Internet of Lighting (IoL)TM is our step in the direction of offering our customers best in class solutions in Lighting & beyond. It is Wipro Lighting's platform on which lighting and technology confluence.

Technologies

- **Power over Ethernet (PoE) based Solutions**
- **Bluetooth Low Energy (BLE)**
- **InSyncTM : Human Centric Lighting**
- **Smart & Connected Spaces**
- **Smart & Connected Outdoors**
- **Li-Fi based Technology Solutions**



Suspended Luminaires Range

Modern Workspaces

Do your offices in style



Axeon Dropdown | LM34

Extruded aluminium Linear profile Luminaire with volumetric light distribution. The translucent satin PMMA drop down diffuser lits up space with volumetric lighting, complying to LG7 guidelines.

Catalogue Reference No.	Wattage	Length (mm)	CCT (K)	LP ₹
LM34-251XXX-57DDG1	20W	1200	5700	8,350
LM34-251XX-57DDCG1	20W	1200	5700	8,450
LM34-501-XX-57DDG1	40W	2400	5700	16,390
LM34-501XX-57DDCG1	40W	2400	5700	16,490

Also available in 4000K CCT, Analog/DALI dimmable, white Colour tunable & black Colour housing option, Order suspension separately.





Axeon | LM34 (Bidirectional: Up & Down)

Suspended linear light solution for contemporary workspaces. Extruded Aluminium Housing with high transmittivity HET diffuser for standalone and seamless end to end connectivity. Available in 4 feet and 8 feet variants.

Catalogue Reference No.	Wattage	Length (mm)	CCT (K)	LP ₹
LM34-361-XXX-57WG1	30W	1200	5700	8,750
LM34-361XXX-57WCG1	30W	1200	5700	8,850
LM34-721-XXX-57WG1	60W	2400	5700	17,050
LM34-721XXX-57WCG1	60W	2400	5700	17,150

Also available in 4000K CCT. Analog/DALI dimmable, white Colour tunable and black Colour housing option, Order suspension separately. (Mentioned in suspensions section on page number 18)




Axeon | LM34 (Unidirectional: Down)

Suspended linear light solution for contemporary workspaces. Extruded Aluminium Housing with high transmittivity HET diffuser for standalone and seamless end to end connectivity. Available in 4 feet and 8 feet variants.

Catalogue Reference No.	Wattage	Length (mm)	CCT (K)	LP ₹
LM34-251-XXX-57WG1	20W	1200	5700	7,150
LM34-251XXX-57WCG1	20W	1200	5700	7,250
LM34-401-XXX-57WG1	30W	1200	5700	8,650
LM34-401XXX-57WCG1	30W	1200	5700	8,750
LM34-501-XXX-57WG1	40W	2400	5700	14,190
LM34-501XXX-57WCG1	40W	2400	5700	14,290
LM34-801-XXX-57WG1	60W	2400	5700	17,490
LM34-801XXX-57WCG1	60W	2400	5700	17,590

Also available in 4000K CCT, Analog/DALI dimmable, white Colour tunable and black Colour housing option, Order suspension separately. (Mentioned in suspensions section on page number 18)

NEW

Axeon | LM34 (Angular connectors- V, Y and L)

Unique connectors to create V, Y, L and T shape pattern with seamless connectivity.

Catalogue Reference No.	Wattage	Shape	CCT (K)	LP ₹
LM34-141300Y57WCG1	15W	Y (120°)	5700	6,750
LM34-930300V57WCG1	10W	V	5700	4,990
LM34-930300L57WCG1	10W	L	5700	4,990
LM34-930300T57WCG1	15W	T	5700	7,350

Also available in 4000K CCT.



Lineos | LM31

Linear Suspended luminaire, housing made of extruded Aluminium with satin finish PMMA diffuser for standalone and seamless end to end connectivity. Available in 4 feet and 8 feet variants.

Catalogue Reference No.	Wattage	Length	CCT (K)	LP ₹
LM31-211-XXX-57WG1	20W	1200	5700	6,990
LM31-211XXX-57WCG1	20W	1200	5700	7,150
LM31-401-XXX-57WG1	30W	1200	5700	7,350
LM31-401XXX-57WCG1	30W	1200	5700	7,390
LM31-421-XXX-57WG1	40W	2400	5700	13,190
LM31-421XXX-57WCG1	40W	2400	5700	13,290
LM31-801-XXX-57WG1	60W	2400	5700	15,150
LM31-801XXX-57WCG1	60W	2400	5700	15,250

Also available in 4000K CCT, Analog/DALI dimmable, white Colour tunable and black Colour housing option, Order suspension separately. (Mentioned in suspensions section on page number 18)



Aslimline | LM77

The slimmest suspended luminaire with efficient LEDs and edge-lit optics for contemporary workspaces.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LM77-441-XXX-57-V1	32W	5700	11,950

Also available in 4000K CCT. Depth: 15mm, Width: 122mm, Order suspension separately. (Mentioned in suspensions section on page number 18)


NEW

Aslimline - X | LM77

The slimmest wide suspended luminaire with efficient LEDs and edge-lit optics for contemporary workspaces.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LM77-521-XXX-57-V1	32W	5700	14,790

Also available in 4000K CCT. Depth: 15mm, Width: 180mm, Order suspension separately. (Mentioned in suspensions section on page number 18)



Pie | LM78

Up-Down light distribution luminaire with extruded white powder coating aluminium housing and satin finish PMMA diffuser offers bright ceiling with uniformly illuminated space. Suitable for standalone and continuous row installation. Available in 4 feet and 8 feet.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LM78-401-XXX-57-XX	26W	5700	13,190
LM78-401-XXX-57-CT	26W	5700	13,290
LM78-801-XXX-57-XX	58W	5700	26,290
LM78-801-XXX-57-CT	58W	5700	26,390

Also available in 4000K CCT. Order suspension separately. (Mentioned in suspensions section on page number 18)

NEW

Inspiro | LM41/42

Revolutionary anti-glare luminaire, Inspiro is the linear suspended luminaire with UGR less than 9.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LM41-481-XXX-40-XX	40W	4000	33,990
LM42-771-XXX-40-XX	50W	4000	37,890

Prices are inclusive of suspension kit.



Suspension for Axeon | LMX34

Universal suspension system with the quick onsite adjustment: mounting with 2 nos. suspension from the ceiling.

Catalogue Reference No.	Description	LP ₹
LMX341	Suitable for installation on RCC ceiling	590
LMX342	Suitable for installation on modular grid Prelude 24mm Ceiling system	690
LMX343	Suitable for installation on modular grid Silhouette 15mm Ceiling system	690



Suspension for Lineos & Pie | WVX86

Universal suspension system with quick onsite adjustment: mounting with 2 nos. suspension from ceiling.

Catalogue Reference No.	Description	LP ₹
WVX861	Suitable for installation on RCC ceiling	590
WVX862	Suitable for installation on modular grid Prelude 24mm Ceiling system	690
WVX863	Suitable for installation on modular grid Silhouette 15mm Ceiling system	690



Suspension for Aslimline | LMX77

Universal suspension system with quick onsite adjustment: mounting with 2 nos. suspension from ceiling.

Catalogue Reference No.	Description	LP ₹
LMX771	Suitable for installation on RCC ceiling	550
LMX772	Suitable for installation on modular grid Armstrong Prelude Ceiling	650
LMX773	Suitable for installation on modular grid Armstrong Silhouette Ceiling	650

NEW



Vertica | LD30

A uniquely designed suspended circular luminaire with efficient illumination provides beautiful ambience in open ceiling & collaborative spaces.



Scan QR Code
for more details

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LD30-101-36B-40-PL	10W	4000	4,790
LD30-101-36W-40-PL	10W	4000	4,790
LD30-201-36B-40-PL	20W	4000	6,490
LD30-201-36W-40-PL	20W	4000	6,490
LD30-301-36B-40-PL	30W	4000	7,790
LD30-301-36W-40-PL	30W	4000	7,790
LD30-101-36B-40-PS	10W	4000	4,490
LD30-101-36W-40-PS	10W	4000	4,490
LD30-201-36B-40-PS	20W	4000	6,190
LD30-201-36W-40-PS	20W	4000	6,190
LD30-301-36B-40-PS	30W	4000	7,490
LD30-301-36W-40-PS	30W	4000	7,490

All variants are also available in 24° beam angle. To order, replace 36 with 24 in above catalogue no.

PL - Long length PS - Short length.

Available in surface mounted version (Refer page number 24)

NEW



Halo Plus | LD99

Suspended unique product on aesthetics and performance. Extruded aluminium housing with microtexture powder coating. Available in Matte black and white housing Colour options.



Scan QR Code
for more details

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LD99-151-XXX57PMWH	12W	5700	3,850
LD99-211-XXX57PMWH	15W	5700	4,050
LD99-281-XXX57PMWH	18W	5700	4,250
LD99-151-XXX57PMBL	12W	5700	3,850
LD99-211-XXX57PMBL	15W	5700	4,050
LD99-281-XXX57PMBL	18W	5700	4,250

Analog/DALI dimmable and white Colour tunable. Also available in 4000K CCT.

WH - Housing colour white, BL - Housing colour black.

Available in surface mounted version (Refer page number 25)



Pendant Luminaire | LH13

Pendant mounted LED luminaire with spun aluminium reflector and high performance is suitable for accent and functional lighting.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LH13-301-060-57-XX	32W	5700	8,490

Also available in 4000K CCT.




Orbit | LM71

Suspended Luminaire in circular form factor, fully diffused LED luminaire with HET diffuser illuminates the collaborative space with uniform and bright light.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LM71-341-XXX-57-G1	26W	5700	11,490
LM71-341-XXX57SMG1	26W	5700	13,490
LM71-441-XXX-57-G1	34W	5700	12,390
LM71-441-XXX57SMG1	34W	5700	14,390
LM71-441-45057RMG1	34W	5700	12,390

Also available in 4000K CCT, Analog/DALI dimmable and white Colour tunable. Prices are inclusive of suspension kit.

NEW



Picasso Sphere | LM84

Unique sphere shaped suspended luminaire range to add innovative shapes and forms in collaborative spaces .

Catalogue Reference No.	LP ₹
LM84-D300-CRWH	15,450

*Lamp of E27 base has to be ordered separately.

NEW



Picasso Semisphere | LM85

Unique shaped suspended luminaire range to add innovative shapes and forms in collaborative spaces .

Catalogue Reference No.	LP ₹
LM85-D300-WHST	15,450

*Lamp of E27 base has to be ordered separately.

NEW



Picasso Dome | LM86

Unique semi circled shaped suspended luminaire range to add innovative shapes and forms in collaborative spaces .

Catalogue Reference No.

LP ₹

LM86-D400-BLGD

15,350

*Lamp of E27 base has to be ordered separately.

NEW



Picasso Teardrop | LM87

Unique natural water drop shaped suspended luminaire range to add innovative shapes and forms in collaborative spaces .

Catalogue Reference No.

LP ₹

LM87-D320-BLGD

14,790

*Lamp of E27 base has to be ordered separately.

NEW



Picasso Hexadome | LM88

Unique hexagon shaped suspended luminaire range to add innovative shapes and forms in collaborative spaces .

Catalogue Reference No.

LP ₹

LM88-D570-BLGD

16,450

*Lamp of E27 base has to be ordered separately.



Comfort Flip | LW06

Best in class healthcare lighting solution committed to patient wellness. Innovative flip feature offering multiple lighting modes.



Catalogue Reference No.

Wattage

CCT (K)

LP ₹

LW06-401-XXX-40-XX

26W

4000

20,690

LW06-401-XXX-40-WS

26W

4000

20,990



Comfort Bed Light | LW04

Extruded aluminium housing with PMMA diffuser offers personalised bidirectional up & down light for pleasant and soothing light experience for enhanced well-being.

Catalogue Reference No.

Wattage

CCT (K)

LP ₹

LW04-411-XXX-57-XX

31W

5700

13,550

LW04-411-XXX-57-WS

31W

5700

13,950

Downlighter Section

Commercial Interiors

Create the ambience



Helios | LD90

Recessed Downlighter with Pressure die cast aluminium housing for effective thermal management and high transmission factor PMMA diffuser for better performance.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LD90-111-XXX-65-XX*	9W	6500	1,490
LD90-141-XXX-65-XX*	12W	6500	1,590
LD90-191-XXX-65-XX**	15W	6500	1,690
LD90-231-XXX-65-XX***	18W	6500	1,890

Cutout dimensions: *Ø125 mm | **Ø145 mm | ***Ø165 mm. Also available in 4000K CCT.




Helix | LD91

Recess mounted die cast aluminium downlighter with high transmission diffuser with a diameter suitable for refurbishment projects.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LD91-141-XXX-65-XX*	11W	6500	1,790
LD91-201-XXX-65-XX*	15W	6500	1,990

Cutout dimensions: *Ø165 mm. Also available in 4000K CCT.

NEW



Helix Square | LD93

Recess mounted die cast aluminium square downlighter with high transmission diffuser offers bright and uniform illumination.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LD93-141-XXX-65-XX*	11W	6500	1,990
LD93-201-XXX-65-XX*	15W	6500	2,190

Cutout dimensions: *165 mm x 165 mm. Also available in 4000K CCT.



Iris | LD71

Recess mounted Downlight with pressure die cast aluminium housing and HET diffuser offer bright and efficient illumination for office and retail spaces.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LD71-111-SMS-65-XX*	11W	6500	1,790
LD71-161-SML-65-XX**	15W	6500	1,950

Cutout dimensions: *Ø110 mm | **Ø145 mm. Also available in 5700K and 4000K CCT.



Halo | CRDL 11

Recess Mounted LED Downlighter with high efficacy. Housing made of extruded aluminium with high translucent HET diffuser.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
CRDL11R008HP57*	6W	5700	1,950
CRDL11R013HP57*	9W	5700	2,050
CRDL11R017HP57*	12W	5700	2,350
CRDL11R023HP57*	18W	5700	2,790
CRDL11R033HP57**	26W	5700	4,590

Cutout dimensions: *Ø172 mm | **Ø220 mm

NEW



Vertica | LD30

A uniquely designed surface mounted cylindrical profile luminaire with efficient illumination provides beautiful ambience in open ceiling & collaborative spaces.



Scan QR Code for more details

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LD30-101-36B-40-SS	10W	4000	4,150
LD30-101-36W-40-SS	10W	4000	4,150
LD30-201-36B-40-SS	20W	4000	5,850
LD30-201-36W-40-SS	20W	4000	5,850
LD30-301-36B-40-SS	30W	4000	7,150
LD30-301-36W-40-SS	30W	4000	7,150

All variants are available in 24° beam angle. To order, replace 36 with 24 in above catalogue no.

NEW

Halo Plus | LD99


Surface mounted unique tapered profile product on aesthetics and performance. Housing with microtexture powder coating. Available in Matte black and white variants.



Scan QR Code for more details

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LD99-151-XXX57SMWH	12W	5700	3,650
LD99-211-XXX57SMWH	15W	5700	3,850
LD99-281-XXX57SMWH	18W	5700	4,150
LD99-151-XXX57SMBL	12W	5700	3,650
LD99-211-XXX57SMBL	15W	5700	3,850
LD99-281-XXX57SMBL	18W	5700	4,150

Also available in Analog/DALI dimmable and white Colour tunable.
And in 4000K CCT. WH - Housing colour White, BL - Housing colour Black.



Gimball | LD 56

Recessed Mounted LED COB Downlighter with high efficacy. Housing made of extruded aluminium. Options available in various beam angles to suit varied applications in office and retail spaces.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LD56-251-060-40-XX*	20W	4000	3,950
LD56-501-060-40-XX**	32W	4000	4,650
LD56-381-060-40-XX**	41W	4000	5,590

Cutout dimensions: *Ø115 mm | **Ø135 mm. Also available in beam angles: 16°, 24°, 36°.




Gimball | LD 58

Recessed Mounted LED square shaped COB Downlighter with high efficacy. Housing made of extruded aluminium. Options available in various beam angles to suit varied applications in office and retail spaces.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LD58-251-060-40-XX*	20W	4000	4,190
LD58-501-060-40-XX**	32W	4000	4,850
LD58-381-060-40-XX***	41W	4000	6,490

Cutout dimensions: *95 mm x 95 mm | **135 mm x 135 mm | ***150 mm x 150 mm. Also available in beam angles: 16°, 24°, 36°. Available in twin & triple head options.




Track Light | LD57

Track mounted LED COB luminaire with high efficacy. Housing made of extruded aluminium. Options available in various beam angles to suit varied applications in office and retail spaces.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LD57-251-024-40-XX	20W	4000	5,250
LD57-381-024-40-XX	32W	4000	5,350
LD57-501-024-40-XX	41W	4000	6,650

Also available in beam angles: 36°, 60°. Order suitable accessories as below.

Catalogue Reference No. (for LD57)		LP ₹
XTS-5100	Single phase 1 mtr track	1,190
XTS-5200	Single phase 2 mtr track	2,390
XTS51	Straight connector	290
SKB520	2 mtr single suspension	590



Swivel Projector | LD59

Recessed Mounted Adjustable LED COB Downlighter with high efficacy. Housing made of extruded aluminium. Options available in various beam angles to suit varied applications in office and retail spaces.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LD59-251-036-40-XX*	20W	4000	5,690
LD59-381-036-40-XX**	32W	4000	6,690
LD59-501-036-40-XX***	41W	4000	9,590

Cutout dimensions: *Ø110 mm | **Ø140 mm | *** Ø165 mm. Also available in beam angles: 16°, 24°, 60°.





inSync™

[MIND + BODY + LIGHT]

human centric
lighting solutions

Transform workspaces from
constant to dynamic lighting

Enhance employee
wellbeing and productivity

Work with multiple platforms
PoE, DALI or Bluetooth



Human Centricity - Lighting for People

The wellness quotient of employees working in office space is gaining high importance. The WELL Building standard (WELL) provides guidelines that minimize disruption to the body's circadian system enhance productivity, support good sleep quality and provide appropriate visual acuity.

Wipro InSync™ range of products for human centric lighting and designed to offer lighting solutions that promote employee's well-being, mood, and health, improve concentration, safety, and efficiency in workplaces or educational environments. By changing Colour of light and/or intensity of light, we are focusing on providing bio-dynamic light based on human circadian rhythm. It aims at creating perfect synchrony of mind, body, and light to craft workspaces that enhance employee wellbeing & productivity and make light work 'Just Right' for the employees

InSync™ range for Human Centric Lighting Solutions



Opus | LM38 (in white colour tunable)

Opus is progressive and modern in design with unique Spherical drop down diffuser and surrounding light chamber. It subtly introduces a circular geometry and blends into the ceiling, making the environment cheerful and vibrant. It comes with the versatile lighting modes-direct, indirect and direct-indirect to suit different customer needs.



Scan QR Code for more details

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LM38-361-XXX-2765	32W	Tunable: 3000-6500	On Request

Frame to be ordered separately for installation in POP/gypsum ceiling. Catalogue no. for frame is 9180P01089-LP Rs. 590.



Verge | LM29 (in white colour tunable)

A versatile recessed bar suspended extruded aluminium luminaire with optically researched seamless HET polycarbonate diffuser with 10% uplight and 90% downlight. Uniquely designed product with consistency, uniformity and energy saving brings life to space.



Scan QR Code for more details

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LM29-451-XXX-2765	33W	Tunable: 3000-6500	On Request

Frame to be ordered separately for installation in POP/gypsum ceiling. Catalogue no. for frame is 9180P01089-LP Rs. 590.



Immaculate Plus | CRCO10 (in white colour tunable)

High efficient white powder coated luminaire with 120 Lm/W efficacy and helps in power saving and cost saving. Best-in-class LEDs consumes lesser energy reducing energy cost and proves to be an ideal solution for green buildings.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
CRCO10R036HP2765	33W	Tunable: 3000-6500	On Request


Frame to be ordered separately for installation in POP/gypsum ceiling. Catalogue no. for frame is 9180P01089-LP Rs. 590.



TZ | LM35 (in white colour tunable)

Recess mounted extruded aluminium housing, luminaire suitable for standalone & continuous techzone ceiling. PMMA diffuser for uniform homogenous light.


Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LM35-381-XXX-2765	28W	Tunable: 3000-6500	On Request
LM35-381XXX2765CT	28W	Tunable: 3000-6500	On Request



Axeon | LM34 (in white colour tunable) (Bidirectional: Up & Down)

Suspended linear light solution for contemporary workspaces. Extruded Aluminium Housing with High Transmission factor HET diffuser for standalone and seamless end to end connectivity. Available in 4 feet and 8 feet variants.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LM34-361-XXX-2765	29	Tunable: 3000-6500	On Request
LM34-721-XXX-2765	58	Tunable: 3000-6500	On Request



Axeon | LM 34 (in white colour tunable) (Unidirectional: Down)

Linear light solution for Extruded aluminium suspended luminaire with down illumination to focus on task area for enhancement of productivity. HET diffuser for standalone and seamless end to end connectivity. Available in 4 feet and 8 feet variants.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LM34-251-XXX-2765	20W	Tunable: 3000-6500	On Request
LM34-501-XXX-2765	40W	Tunable: 3000-6500	On Request



Halo | CRDL11 (in white colour tunable)

Recessed mounted LED Downlighter with high efficacy. Housing made of extruded aluminium with high translucent HET diffuser.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
CRDL11R033HP2765	17W	Tunable: 3000-6500	On Request

Cutout dimensions: *Ø172 mm | **Ø220 mm



InSync™ Touch Panel

Scene select for customised scene + dimming + colour tuning options and ON/OFF.

Catalogue Reference No.	Description	LP ₹
192GW+290W+402 (White colour)	Dimming + Colour Tuning + Scene Select	On Request
192GB+290B+402 (Black colour)	Dimming + Colour Tuning + Scene Select	On Request
191GW+290W+402 (White colour)	Dimming + Scene Select	On Request
191GB+290B+402 (Black colour)	Dimming + Scene Select	On Request



Lighting Controls

Convenience and comfort



eSavvy | CRPS10
Smart PIR occupancy sensor.

Catalogue Reference No.

LP ₹

CRPS10R010A

Passive infrared sensor

4,090

Cutout dimensions: Ø72 mm.



eSavvy | CRPS13
PIR sensor switching photocell.

Catalogue Reference No.

LP ₹

CRPS13R010A

Occupancy sensor with daylight ON/OFF.

5,990

Cutout dimensions: Ø72 mm.



eSavvy | CRAD
PIR occupancy sensor with daylight dimming.

Catalogue Reference No.

LP ₹

CRADDPS10R010A

Occupancy sensor with daylight dimming suitable for 1-10V analogue ballast

8,090

Cutout dimensions: Ø72 mm.



eSense | COM 20/CDA 21
Microwave occupancy sensor with daylight dimming.

Catalogue Reference No.

LP ₹

COM 20010

Occupancy sensor

14,990

CDA 21010

Occupancy sensor with daylight dimming suitable for 1-10V analogue ballast

16,890

Cutout dimensions: Ø60 mm.



eSense | COM 23/CDA 24

High performance microwave occupancy and daylight dimming sensor.

Catalogue Reference No.

LP ₹

COM 23010 Occupancy sensor 12,590

CDA 24010 Occupancy sensor with daylight dimming suitable for 1-10V analogue ballast 13,590


Cutout dimensions: Ø60 mm.





Cleanroom & Sterile Areas

Clean and pure light
for zero error zones




Vision BOCR | LC20

Recess mounted, bottom opening cleanroom LED Luminaire. Housing made of CRCA powder coated.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LC20-411-XXX-57-XX*	30W	5700	8,250
LC20-551-XXX-57-XX**	42W	5700	9,250
LC20-721-XXX-57-XX**	60W	5700	10,950

Cutout dimensions: *490 mm x 490 mm | **580 mm x 580 mm.



Vision TOCR | LC30

Recess mounted, Top opening cleanroom LED Luminaire. Housing made of CRCA powder coated. Specially designed self alignment mounting mechanism, equipped with specially designed pressure plates.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LC30-411-XXX-57-G1	30W	5700	9,750
LC30-551-XXX-57-G1	42W	5700	10,490
LC30-721-XXX-57-G1	60W	5700	11,890
LC30-102-XXX-57-G1*	78W	5700	15,390
TFTC100*	-	-	4,190

*Top frame & top cover (TFTC) to be ordered separately. Cutout dimensions: 600 mm x 600 mm.

Leaders in cleanroom lighting


Dedicated team of cleanroom lighting specialists VisionLED range is designed and developed by technical experts with a sound understanding of a cleanroom. | **Conformity to international standards** VisionLED range conforms to international guidelines for USFDA - Food and Drug Administrative Procedures and GMP - Good Manufacturing Practices. | **Design and develop customised solutions** Over the years, we have designed and developed more than 750 customised product variants catering to the ever-evolving needs of Pharmaceutical, Food & Beverages and Electronics & Semi Conductor Industries. | **More than 20 years of experience** Today, most leading companies choose VisionLED luminaires as the preferred choice for their cleanrooms. **Over 2000 successful installations** With as many as 2000 successful installations, VisionLED is uniquely positioned as the leader in cleanroom lighting For any queries on cleanroom lighting.

For any queries on cleanroom lighting applications, contact our nearest branch or write to helpdesk.lighting@wipro.com

A large industrial factory with workers and machinery. The scene is brightly lit with overhead lights. In the foreground, a worker in a maroon jacket and grey pants is working on a large, curved metal component. The background shows a complex network of steel beams, pipes, and machinery, with other workers visible in the distance.

Industries

Enhanced efficiency with
effective savings

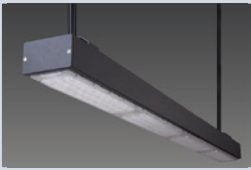

Xpress - Linear Highbay | LH15

Aluminium extruded Linear highbay a ideal solution refurbishment of linear conventional industrial fixtures with high performance that offers safe and productive manufacturing workspace.

Catalogue Reference No.	Wattage	Beam Angle	CCT (K)	LP ₹
LH15-102-060-57-XX	75W	60°	5700	17,490
LH15-102-090-57-XX	75W	90°	5700	17,490
LH15-142-060-57-XX	100W	60°	5700	22,990
LH15-142-090-57-XX	100W	90°	5700	22,990
LH15-182-060-57-XX	130W	60°	5700	30,890
LH15-182-090-57-XX	130W	90°	5700	30,890
LH15-282-060-57-XX	200W	60°	5700	45,990
LH15-282-090-57-XX	200W	90°	5700	45,990



Radial Pro+ | LH17

High lumen output, SMD LED highbay with innovatively designed aluminium heat sink for excellent thermal management. Luminaire efficacy upto 150 Lm/W helps to reduce quantity/wattage, thus generating high operational savings



Scan QR Code
for more details

Catalogue Reference No.	Wattage	Beam Angle	CCT (K)	LP ₹
LH17-132-060-50-XX	80W	60°	5000	18,050
LH17-132-090-50-XX	80W	90°	5000	18,050
LH17-162-060-50-XX	100W	60°	5000	18,950
LH17-162-090-50-XX	100W	90°	5000	18,950
LH17-192-060-50-XX	120W	60°	5000	21,550
LH17-192-090-50-XX	120W	90°	5000	21,550
LH17-232-060-50-XX	140W	60°	5000	24,790
LH17-232-090-50-XX	140W	90°	5000	24,790
LH17-282-060-50-XX	200W	60°	5000	29,890
LH17-282-090-50-XX	200W	90°	5000	29,890

NEW

Radial Square | LH20

High lumen output, SMD LED highbay with innovatively designed aluminium heat sink for excellent thermal management. Luminaire efficacy upto 130 Lm/W helps to reduce quantity/wattage, thus generating high operational savings.

Catalogue Reference No.	Wattage	Beam Angle	CCT (K)	LP ₹
LH20-102-060-57-XX	80W	60°	5700	14,890
LH20-102-090-57-XX	80W	90°	5700	14,890
LH20-122-060-57-XX	100W	60°	5700	18,690
LH20-122-090-57-XX	100W	90°	5700	18,690
LH20-132-060-57-XX	120W	60°	5700	20,390
LH20-132-090-57-XX	120W	90°	5700	20,390
LH20-172-060-57-XX	140W	60°	5700	22,190
LH20-172-090-57-XX	140W	90°	5700	22,190
LH20-192-060-57-XX	150W	60°	5700	24,990
LH20-192-090-57-XX	150W	90°	5700	24,990
LH20-202-060-57-XX	165W	60°	5700	27,990
LH20-202-090-57-XX	165W	90°	5700	27,990
LH20-212-060-57-XX	180W	60°	5700	28,990
LH20-212-090-57-XX	180W	90°	5700	28,990
LH20-272-060-57-XX	200W	60°	5700	29,990
LH20-272-090-57-XX	200W	90°	5700	29,990



Radial Prime | LH09

Radial prime consists of the unique aluminium heat sink for 3D heat dissipation and polycarbonate high transitivity diffuser for wide and uniform light distribution.


Catalogue Reference No.	Wattage	Beam Angle	CCT (K)	LP ₹
LH09-102-060-50-G1	80W	60°	5000	14,750
LH09-102-100-50-G1	80W	100°	5000	14,750
LH09-122-060-50-G1	100W	60°	5000	17,850
LH09-122-100-50-G1	100W	100°	5000	17,850
LH09-172-060-50-G1	140W	60°	5000	22,190
LH09-172-100-50-G1	140W	100°	5000	22,190
LH09-232-060-50-G1	200W	60°	5000	27,190
LH09-232-100-50-G1	200W	100°	5000	27,190



Radial | LH09

Rugged COB LED midbay and highbay with aluminium heat sink for efficient heat dissipation and highly effective optics for maximum illumination for varied industrial applications.


Catalogue Reference No.	Wattage	Beam Angle	CCT (K)	LP ₹
LH09-851-060-50-V6	65W	60°	5000	13,390
LH09-851-090-50-V6	65W	90°	5000	13,390
LH09-921-060-50-V6	80W	60°	5000	15,990
LH09-921-090-50-V6	80W	90°	5000	15,990
LH09-132-060-50-V6	100W	60°	5000	16,950
LH09-132-090-50-V6	100W	90°	5000	16,950
LH09-122-060-50-V6	120W	60°	5000	17,890
LH09-122-090-50-V6	120W	90°	5000	17,890
LH09-192-060-50-V6	135W	60°	5000	19,150
LH09-192-090-50-V6	135W	90°	5000	19,150
LH09-212-060-50-V6	165W	60°	5000	20,090
LH09-212-090-50-V6	165W	90°	5000	20,090
LH09-262-060-50-V6	200W	60°	5000	29,550
LH09-262-090-50-V6	200W	90°	5000	29,550



Canopy Luminaire | LH14

Recess mounted under canopy aluminium die cast luminaire with PC lens for better optical performance, superior aesthetic finish and ensuring safety for application like oil retails. Rated IP65.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LH14-102-XXX-57-0C	80W	5700	13,250
LH14-102-XXX-57-G2	80W	5700	13,150
LH14-192-XXX-57-0C	150W	5700	25,250
LH14-192-XXX-57-G2	150W	5700	25,150



XlinePro | LE14

Trunk mounted LED channel, specially designed extruded aluminium trunk with snap fit arrangement in product for easy and flexible installation.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LE14-491-XXX-57-XX	39W	5700	7,890

Order trunk separately.



Trunk for Xline Pro | LE14

Pre-wired Aluminium trunk with internal wiring and suspension system.

Catalogue Reference No.	Length	LP ₹
LE14A02C	1.77 mtr.	2,590



Xline | LE10

High Efficacy LEDs with MS housing and PC extruded diffuser offers end to end connectivity and high performance to industrial area that require versatile lighting solution. Length 1200 mm.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LE10-491XXX-57HCSL	39W	5700	4,490

Also available in 4000K and 2700K CCT.

NEW

Xline Neo | LE10

High Efficacy LEDs with MS housing and PC extruded diffuser offers end to end connectivity and high performance to industrial area that require versatile lighting solution.
Length 1000 mm.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LE10-491-XXX-57-XX	39W	5700	4,250

Also available in 4000K and 2700K CCT.

NEW

Optima | LL24

High efficiency aluminium profile linear batten with polycarbonate diffuser for enhanced productivity. Ingress protection IP40.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LL24-541-XXX-57-XX	40W	5700	2,290
LL24-541-XXX-57-CD	40W	5700	2,390

Also available in 4000K CCT.



Capsule | LE20

Surface/Pendant mounted totally enclosed LED luminaire.
Ingress Protection: IP66.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LE20-491-XXX-57-G1	40W	5700	5,350



Capsule | WI083

Surface mounted totally enclosed LED luminaire.
Ingress Protection: IP66.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
WI0831208G1	1x18W LED Tube T8	6500	5,350
WI0832208G1	2x18W LED Tube T8	6500	5,950

Suitable to use with LED tubes.

NEW

Dura Wellglass | LE07

Total dust and water jet protected, PDC aluminium constructed powder finish luminaire offer high durability and enhanced performance with energy saving. PC diffuser lit up the dusty and thermal condition space with uniform and bright illumination. Rated IP66.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LE07-501-XXX-50-XX	35W	5000	3,990
LE07-112-XXX-50-XX	70W	5000	7,990

NEW

Bulkhead | LW07

Die cast aluminium housing with complete assembly and PC opal diffuser for uniform illumination. Suitable for surface/wall mounted application. Rated IP65.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LW07-141-XXX-57-XX	10W	5700	2,150



Street Lighting

Safe and vibrant
outdoors

NEW

Skyline+ | LR06

Compact and Trendy LED Streetlight, Housing made of die-cast aluminium, with LED street optic LENS, offering uniform light distribution. Efficacy of Skyline Plus is up to 120 lm/W. Rated IP66.



Scan QR Code
for more details


Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LR06-241-XXX-57-XX	18W	5700	3,150
LR06-311-XXX-57-XX	25W	5700	3,550

NEW

Skyline+ | LR13

Compact and Trendy LED Streetlight, Housing made of die-cast aluminium, with LED street optic LENS, offering uniform light distribution. Efficacy of Skyline Plus is up to 120 lm/W. Rated IP66.


Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LR13-501-XXX-57-XX	35W	5700	5,250



Skyline | LR02

Compact and Trendy LED Streetlight, Housing made of die-cast aluminium, with polycarbonate LENS for uniform light distribution. Rated IP66.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LR02-291-XXX-57-XX	25W	5700	3,150
LR02-331-XXX-57-XX	30W	5700	3,550



Skyline | LR02

Compact and Trendy LED Streetlight, Housing made of die-cast aluminium, with polycarbonate LENS for uniform light distribution. Rated IP66.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LR02-451-XXX-57-G1	40W	5700	6,390
LR02-501-XXX-57-G1	45W	5700	6,750



Skyline | LR02

High performance LED Streetlight, Housing made of die-cast aluminium, with street optic LENS for uniform light distribution. Rated IP66.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LR02-451-XXX-57-XX	40W	5700	6,550
LR02-501-XXX-57-XX	45W	5700	6,890



Skyline | LR02

High performance LED Streetlight, contemporary designed housing made of die-cast aluminium, with street optic LENS for uniform light distribution. Rated IP66.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LR02-671-XXX-57-G2	60W	5700	8,890
LR02-781-XXX-57-G2	70W	5700	9,350
LR02-981-XXX-57-G2	80W	5700	9,790
LR02-102-XXX-57-G2	90W	5700	10,990
LR02-112-XXX-57-G2	100W	5700	11,590



Skyline | LR02

High performance LED Streetlight, contemporary designed housing made of die-cast aluminium, with street optic LENS for uniform light distribution. Rated IP66.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LR02-122-XXX-57-G2	110W	5700	12,590
LR02-132-XXX-57-G2	120W	5700	13,350
LR02-182-XXX-57-G2	150W	5700	23,590



Skyline | LR02

High performance LED Streetlight, contemporary designed housing made of die-cast aluminium, with street optic LENS for uniform light distribution. Rated IP66.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LR02-212-XXX-57-G2	180W	5700	24,790
LR02-242-XXX-57-G2	200W	5700	25,990
LR02-262-XXX-57-G2	220W	5700	29,350
LR02-292-XXX-57-G2	250W	5700	31,350



A photograph of an industrial facility at night, illuminated by numerous bright floodlights. The scene features several tall, cylindrical distillation columns and large storage tanks. The sky is a deep twilight blue. A large green circle is overlaid on the left side of the image, containing the text 'Flood Lighting' and 'Safe and vibrant outdoors'.

Flood Lighting

Safe and vibrant outdoors



Alpha Floodlight | LF19

Aluminium die-cast housing luminaire with unique lens system for enhanced uniform illumination and toughened glass with silicon gasket for IP66 protection.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF19-711-060-57-XX	60W	5700	8,550
LF19-931-060-57-XX	80W	5700	11,550



Alpha Floodlight | LF20

Aluminium die-cast housing luminaire with unique lens system for enhanced uniform illumination and toughened glass with silicon gasket for IP66 protection.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF20-122-060-57-G2	100W	5700	13,790
LF20-132-060-57-G2	120W	5700	15,790
LF20-192-060-57-G2	150W	5700	20,490
LF20-272-060-57-G2	200W	5700	27,790
LF20-342-060-57-G2	250W	5700	35,790
LF20-392-060-57-G3	300W	5700	38,090



Alpha Floodlight | LF20

Aluminium die-cast housing luminaire with unique lens system for enhanced uniform illumination and toughened glass with silicon gasket for IP66 protection.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF20-442-060-57-XX	350W	5700	48,050

NEW

Alpha Floodlight | LF20

Aluminium die-cast housing luminaire with unique lens system for enhanced uniform illumination and toughened glass with silicon gasket for IP66 protection.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF20-502-060-57-G3	400W	5700	On Request
LF20-562-060-57-G3	450W	5700	On Request



Revo Floodlight | LF07

High efficiency LED aluminium housing floodlight with fins for efficient heat dissipation and specially designed glass lens optics for uniform and high illumination to redefine outdoor.

Catalogue Reference No.	Wattage	Beam Angle	CCT (K)	LP ₹
LF07-122-060-50-V5	120W	60°	5000	18,790
LF07-122-090-50-V5	120W	90°	5000	18,790
LF07-152-060-50-V5	150W	60°	5000	23,390
LF07-152-090-50-V5	150W	90°	5000	23,390
LF07-282-060-50-V5	200W	60°	5000	29,990
LF07-282-090-50-V5	200W	90°	5000	29,990
LF07-272-060-50-V5	250W	60°	5000	38,990
LF07-272-090-50-V5	250W	90°	5000	38,990
LF07-422-060-50-V6	300W	60°	5000	50,590
LF07-422-090-50-V6	300W	90°	5000	50,590
LF07-472-060-50-V6	350W	60°	5000	56,890
LF07-472-090-50-V6	350W	90°	5000	56,890
LF07-582-060-50-V6	415W	60°	5000	59,990
LF07-582-090-50-V6	415W	90°	5000	59,990



Landscape Lighting

Redefine landscapes with
better light quality



Urbano Pathway | LP05

Pressure die cast aluminium housing with specially designed optics provide uniform light distribution to redefine outdoor and enhance architectural design.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LP05-711-XXX-65-XX	60W	6500	39,990
LP05-711-XXX-57-XX	60W	5700	39,990



Urbano Pathway | LP06

Pressure die cast aluminium housing with specially designed optics provide uniform light distribution to redefine outdoor and enhance architectural design.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LP06-351-XXX-57-XX	35W	5700	27,790

NEW



Post Top | LP07

Pure polyester UV resistant powder coated die cast aluminium housing with PMMA clear diffuser for uniform illumination.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LP07-251-XXX-57-CL	20W	5700	6,550
LP07-431-XXX-57-CL	35W	5700	7,790
LP07-501-XXX-57-CL	45W	5700	10,750
LP07-671-XXX-57-CL	60W	5700	15,350



Post Top | LP02

Pure polyester UV resistant powder coated die cast aluminium housing with PMMA opal diffuser for uniform illumination.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LP02-501-XXX-57-XX	40W	5700	13,390

NEW

Whistling Oyster | LB12

Path directional reflector with PC diffuser and extruded aluminium powder coated bollard provide uniform illumination for pathways. Sound module is also available as an option to enlightening surrounding with musical notes.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LB12-880-XXX-65-05	7W	6500	7,890
LB12-880-XXX-65-08	7W	6500	8,090
LB12-880-SPK-65-08	7W	6500	18,390
LB12-131-XXX-65-05	11W	6500	8,050
LB12-131-XXX-65-08	11W	6500	8,250
LB12-131-SPK-65-08	11W	6500	18,590

Catalogue no. bearing "SPK" is with speaker option.
Option of 3000K CCT is available.
Catalogue no. ends with 05 - Height 500mm; 08 - 800mm.

NEW

Whistling J | LB13

Path directional reflector with PC diffuser and extruded aluminium powder coated bollard provide uniform illumination for pathways. Sound module is also available as an option to enlightening surrounding with musical notes.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LB13-880-XXX-65-05	7W	6500	7,890
LB13-880-XXX-65-08	7W	6500	8,090
LB13-880-SPK-65-08	7W	6500	18,390
LB13-131-XXX-65-05	11W	6500	8,050
LB13-131-XXX-65-08	11W	6500	8,250
LB13-131-SPK-65-08	11W	6500	18,590

Catalogue no. bearing "SPK" is with speaker option.
Option of 3000K CCT is available.
Catalogue no. ends with 05 - Height 500mm; 08 - 800mm.

NEW

Fantasy Column | LB14

Column made of extruded aluminium housing to redefine landscapes with better light quality. Rated IP65.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LB14-331-XXX-65-XX	32W	6500	On Request

Available in height 3200mm.


NEW

Fantasy Bollard | LB14

Bollard made of extruded aluminium housing to redefine landscapes with better light quality and enhance architectural design. Rated IP65.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LB14-880-XXX-65-05	7W	6500	6,690
LB14-880-XXX-65-08	7W	6500	6,790
LB14-131-XXX-65-05	11W	6500	7,090
LB14-131-XXX-65-08	11W	6500	7,190

Option of 3000K CCT is available.

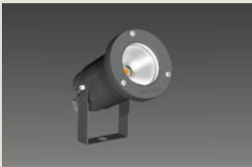

Gardenia | LF05

Compact and aesthetic polyster coated aluminium housed inground/bushlight offers safe and vibrant parking area, pathways and gardens with high illumination and soothing experience.


Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF05-450-036-27-XX	6W	2700	5,990
LF05-600-036-27-XX	8W	2700	6,090

Also Available in 24° and 55° beam angles.



Arcus

Premium outdoor
architectural solution



ARCUS Linear Wall Washer | LF01

Extruded aluminium power coated IP66 linear wall washer to accentuate the artwork on entrances and walls. Tempered glass and optical lens, with high power lumen output LEDs lit up the surrounding with glare free and soothing uniform lighting.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF01-181-015-30-05	20W	3000	18,890
LF01-181-030-30-05	20W	3000	18,890
LF01-361-015-30-10	40W	3000	33,250
LF01-361-030-30-10	40W	3000	33,250

*Driver to be ordered separately; Replace 30 with 60 in the above Catalogue Nos. for 6000K CCT.

Colour Changing Solutions

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF01-181-015-CC-05	20W	RGB	33,550
LF01-181-030-CC-05	20W	RGB	33,550
LF01-361-015-CC-10	40W	RGB	60,690
LF01-361-030-CC-10	40W	RGB	60,690

*Driver and DMX controller to be ordered separately. DMX controller codes are provided in accessories section page no. 63 and 64. Colour changing luminaires have to be with DMX controller.




ARCUS Linear Light Bar | LF03

Extruded aluminium powder coating IP66 linear light bar enlightens the wall grazing applicable area with bright and soothing light distribution.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF03-601-XXX-30-05	9W	3000	10,690
LF03-601-XXX-60-05	9W	6000	10,690
LF03-121-XXX-30-10	17W	3000	16,150
LF03-121-XXX-60-10	17W	6000	16,150

Driver to be ordered separately.



ARCUS Flexi Strip Light | LS27

Flexible frosted encapsulated IP68 strip light with homogenous and light spot free illumination.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LS27-005-120-WW-50	10W/mtr.	3000	39,990

*Driver to be ordered separately. Length of the spool: 4 meter.

Colour Changing Solutions

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LS27-005-120-CC-50	10W/mtr.	RGB	32,790

*Driver and DMX controller to be ordered separately. DMX controller codes are provided in accessories section page no. 63 and 64. Colour changing luminaires have to be with DMX controller.



ARCUS Flood Light- Mini | LF04

Aluminium Die cast housing with high purity lens offers facade lighting with superior performance and glare free light distribution enhancing accent lighting.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF04-181-030-30-XX	12W	3000	17,690
LF04-251-030-30-XX	20W	3000	28,990
LF04-501-030-30-XX	40W	3000	41,190

*Driver to be ordered separately; Replace 30 with 60 in the above Catalogue Nos. for 6000K CCT.

Colour Changing Solutions

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF04-181-030-CC-XX	12W	RGB	23,790
LF04-251-030-CC-XX	20W	RGB	36,450
LF04-501-030-CC-XX	40W	RGB	50,990

*Driver and DMX controller to be ordered separately. DMX controller codes are provided in accessories section page no. 63 and 64. Colour changing luminaires have to be with DMX controller.



ARCUS Inground Light | LI20

Aluminium die cast light with high purity lens for illuminating pathways enhancing the safe and vibrant area.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LI20-600-030-30-XX	6W	3000	12,890
LI20-111-030-30-XX	12W	3000	21,050
LI20-231-030-30-XX	18W	3000	27,250

*Driver to be ordered separately; Replace 30 with 60 in the above Catalogue Nos. for 6000K CCT.

Colour Changing Solutions

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LI20-600-030-CC-XX	6W	RGB	16,990
LI20-111-030-CC-XX	12W	RGB	26,750
LI20-231-030-CC-XX	18W	RGB	29,690

*Driver and DMX controller to be ordered separately. DMX controller codes are provided in accessories section page no. 63 and 64. Colour changing luminaires have to be with DMX controller.



ARCUS Under Water Light | LU03

Hard chrome plated stainless steel with silicon sealed glass offers colourful illumination for waterbody in architectural and landscape area.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LU03-950-030-30-XX	6W	3000	22,090
LU03-211-030-30-XX	18W	3000	28,750
LU03-371-030-30-XX	36W	3000	36,550

*Driver to be ordered separately; Replace 30 with 60 in the above Catalogue Nos. for 6000K CCT.

Colour Changing Solutions

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LU03-950-030-CC-XX	6W	RGB	23,790
LU03-211-030-CC-XX	18W	RGB	29,690
LU03-371-030-CC-XX	36W	RGB	41,290

*Driver and DMX controller to be ordered separately. DMX controller codes are provided in accessories section page no. 63 and 64. Colour changing luminaires have to be with DMX controller.





ARCUS Step Light | LT50

Compact, robust, non-corrosive aluminium body with high lumen output LEDs that enhances the safety and architectural design of step and entrance areas.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LT50-050-XXX-30-XX	3.2W	3000	12,190
LT50-050-XXX-60-XX	3.2W	6000	12,190



ARCUS Wall Light | LW31/32

Extruded aluminium wall light for exterior wallgrazing.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LW31-211-022-30-XX	18W	3000	21,890
LW31-211-022-60-XX	18W	6000	21,890
LW32-321-022-30-XX	24W	3000	28,890
LW32-321-022-60-XX	24W	6000	28,890

LW31 - Uni-directional . LW32 - Bi-directional.



ARCUS Wall Light | LW33

Die-cast aluminium wall light for exterior wallgrazing.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LW33-101-025-30-XX	12W	3000	15,990





ARCUS Flood Light | LF27

Aluminium die-cast flood light with high light output and performance for façade and monument lighting.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF27-601-040-30-XX	58W	3000	On Request
LF27-901-040-30-XX	85W	3000	On Request
LF27-122-040-30-XX	113W	3000	On Request

*Driver to be ordered separately; Replace 30 with 60 in the above Catalogue Nos. for 6000K CCT.

Colour Changing Solutions

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF27-601-040-CC-XX	58W	RGB	On Request
LF27-901-040-CC-XX	85W	RGB	On Request
LF27-122-040-CC-XX	113W	RGB	On Request

*Driver and DMX controller to be ordered separately. DMX controller codes are provided in accessories section page no. 63 and 64. Colour changing luminaires have to be with DMX controller.



ARCUS Flood Light Mega | LF28

IP66 flood light with Die cast aluminium housing and glare free wide angle illumination for façade and monument lighting .

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF28-142-040-30-XX	158W	3000	On Request
LF28-242-040-30-XX	286W	3000	On Request
LF28-482-040-30-XX	580W	3000	On Request

*Order driver separately. Available in 6500 K CCT options.

Colour Changing Solutions

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LF28-142-040-CC-XX	158W	RGB	On Request
LF28-242-040-CC-XX	286W	RGB	On Request
LF28-482-040-CC-XX	580W	RGB	On Request

*Driver and DMX controller to be ordered separately. DMX controller codes are provided in accessories section page no. 63 and 64. Colour changing luminaires have to be with DMX controller.



DMX Controller and Accessories IP67 Plug-socket T connector (one pair)

Catalogue Reference No.	Description	LP ₹
C-T-2C-IP67	Plug-socket connector(one pair) T Connector for 2Cx1mm ²	2,250
C-T-4C-IP67	IP67 Plug-socket connector(one pair) T Connector for 4Cx0.75mm ²	2,350

This T connector is to be used when multiple luminaires are to be controlled with a Single Driver.
C-T-2C-IP67 - 2 core T connector for Mono colour luminaire, C-T-4C-IP67 - 4 core T connector for RGB luminaire.



DMX Controller and Accessories IP67 Plug-socket S connector

Catalogue Reference No.	Description	LP ₹
C-S-2C-IP67	IP67 Plug-socket connector(one pair) S Connector for 2Cx1mm ²	2,250
C-S-4C-IP67	IP67 Plug-socket connector(one pair) S Connector for 4Cx0.75mm ²	2,350

This Straight connector is to be used when multiple luminaires are to be controlled with a Single Driver
C-S-2C-IP67 - 2 core S connector for Mono colour luminaire, C-S-4C-IP67 - 4 core S connector for RGB luminaire.



DMX Controller and Accessories Driver

Catalogue Reference No.	Output Wattage	Output Voltage	LP ₹
LPV-35-12/24	35W	24V DC	3,950
LPV-60-12/24	60W	24V DC	4,390
LPV-100-12/24	100W	24V DC	7,190
LPV-150-12/24	150W	24V DC	9,850



DMX Controller and Accessories Driver

Catalogue Reference No.	Output Wattage	Output Voltage	LP ₹
ELG-75-24/48	75W	24V DC / 48V DC	9,090
ELG-100-24/48	100W	24V DC / 48V DC	10,050
ELG-150-24/48	150W	24V DC / 48V DC	10,890
ELG-200-24/48	200W	24V DC / 48V DC	13,550
ELG-240-24/48	240W	24V DC / 48V DC	14,090




DMX Controller and Accessories DMX Controller

Catalogue Reference No.	Description	LP ₹
LG70-360-3M-24V	3-Channel Main Controller 24/ 48VDC input/output, max. 360W(24/ 48V)	On Request
LG70-360-3E-24V	3-Channel Expander 24/ 48VDC input/output, max. 360W(24/ 48V)	On Request

All colour-changing luminaires require a DMX controller. DMX controller to be ordered along with the luminaire.
 LG70-360-3E - This is an expander which is to be used to repeat the same sequence and programming done by the main DMX controller.

The logo for SolaRISE+++ is centered within a large yellow circle. It features the brand name in a bold, sans-serif font, with two small plus signs positioned above the final 'E'.

Integrated Solar
streetlights

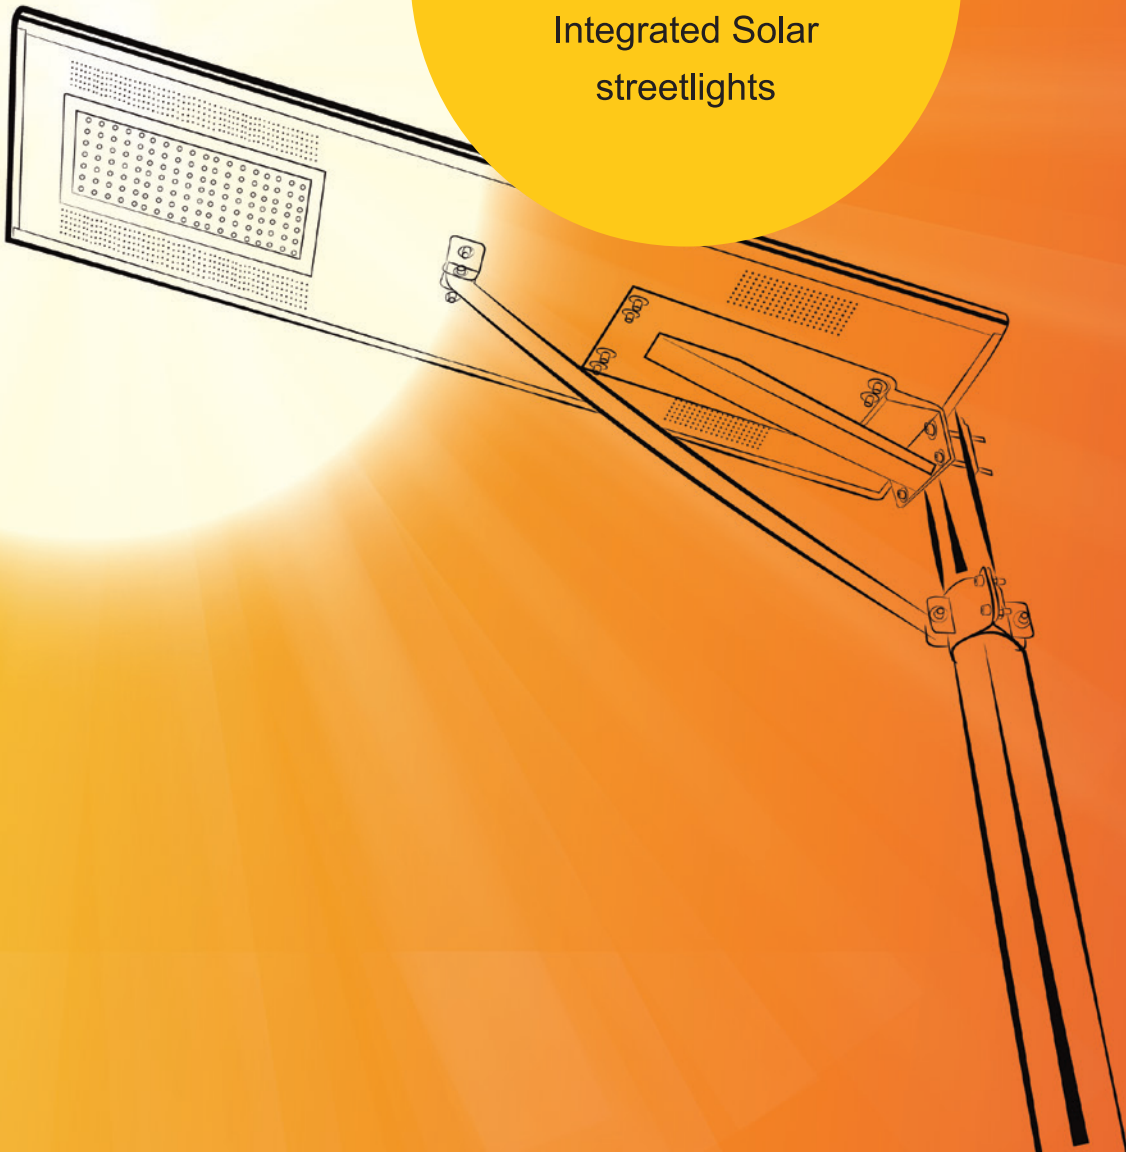

NEW

all-in-one Integrated solar streetlights | LR14

Compact, Aesthetic, Ecofriendly & Modern integrated solar streetlight in extruded aluminium construction with high efficiency monocrystalline silicon photo voltaic panel, High Efficacy SMD LED 6500K having secondary lens optics for street lighting distribution, high performance lithium battery, MPPT charge controller and intelligent control module/sensor with higher reliability, long service life, suitable for easy and quick installation.

Catalogue Reference No.	Wattage	CCT (K)	LP ₹
LR14-141-XXX-65-XX	12W	6500	34,990
LR14-221-XXX-65-XX	15W	6500	40,990
LR14-281-XXX-65-XX	18W	6500	47,050
LR14-301-XXX-65-XX	20W	6500	59,950
LR14-361-XXX-65-XX	25W	6500	62,990
LR14-441-XXX-65-XX	30W	6500	66,750
LR14-591-XXX-65-XX	40W	6500	76,950
LR14-721-XXX-65-XX	50W	6500	92,950
LR14-841-XXX-65-XX	60W	6500	1,09,990
LR14-102-XXX-65-XX	70W	6500	1,14,950
LR14-112-XXX-65-XX	80W	6500	1,20,050
LR14-132-XXX-65-XX	90W	6500	1,58,050
LR14-142-XXX-65-XX	100W	6500	1,69,990
LR14-172-XXX-65-XX	120W	6500	1,90,050

For hybrid operation All-in-one Integrated solar streetlight replace XX with HY in above catalogue no. Additional LP Rs.4000.

Other CCT options available on request.

Prices given are exclusive of poles and to be ordered separately. Subject to minimum order quantity.

NEW



standalone solar streetlights

Eco-friendly modern Standalone Solar Streetlight with Luminaire in pressure diecast aluminium housing, High efficiency Polycrystalline silicon photovoltaic panel, High Efficacy SMD LED 5700K having secondary lens optics for street lighting distribution, High performance LMLA/VRLA/ Lithium Battery for 2/3 days autonomy, high performance PWM/MPPT charge controller with higher reliability and long service life.

Description	LP ₹
Available from 12W to 90W	On Request

Standalone solar streetlight system consists of LED luminaire, PV panel with panel mounting frame.
Battery with battery box and accessories.
Hybrid streetlight option available on request.
Other CCT options available on request.
Prices given are exclusive of poles and to be ordered separately. Subject to minimum order quantity.

A modern office interior featuring a long wooden desk with a white cabinet underneath. A black office chair is positioned at the desk. The ceiling is white with several recessed LED lights and air vents. A large yellow circle is overlaid on the center of the image, containing text.

Cleanray

Range of energy efficient
and high performance
LED luminaires



Elate | CRC010

Recess mounted LED luminaire. Full diffuser provides uniform light.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
CRC010R038HP57GL	36W	5700	4,850
CRC010S038HP57GL	36W	5700	5,150

Frame to be ordered separately for installation in POP/gypsum ceiling.
Catalogue no. for frame is 9180P01089 LP Rs. 590. Cutout dimension: 608 mm x 608 mm.



Immaculate Slim | CRC023

Recess mounted LED slim luminaire with edge lit optics offers uniform and bright illumination for workspace.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
CRC023R036HP65G3	36W	6500	4,750
CRC023R036HP65G4	36W	6500	4,750

Frame to be ordered separately for installation in POP/gypsum ceiling.
Catalogue no. for frame is 9180P01089 LP Rs. 590. Cutout dimension: 608 mm x 608 mm.

NEW




Immaculate Slim | CRC023

Recess mounted LED 4X1 luminaire, Full diffuser provides uniform light.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
CRC023R36HP651X4G3	36W	6500	4,750

Also available in 4000K CCT.

NEW

Glitz | LD98

New age COB downlighter which creates contemporary spaces.
Range available from 6W to 18W. Choice of various beam angles available.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LD98-900-024-40-XX*	6W	4000	1,050
LD98-131-024-40-XX*	9W	4000	1,450
LD98-181-024-40-XX**	12W	4000	1,650
LD98-221-024-40-XX**	15W	4000	2,050
LD98-271-024-40-XX***	18W	4000	2,550

Available in warm 3000K CCT options. Also available in 38° beam angle.

Cutout dimensions: *Ø90 mm | **Ø109 mm | ***Ø140 mm.



Iris Slim Round | LD80

Ultra sleek Recess mounted slim round downlighter.
Range available from 6W to 18W.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LD80-200-XXX-60-XX*	3W	6000	490
LD80-350-XXX-60-XX**	6W	6000	890
LD80-530-XXX-60-XX***	9W	6000	950
LD80-101-XXX-60-XX****	12W	6000	1,290
LD80-131-XXX-60-XX*****	15W	6000	1,390
LD80-171-XXX-60-XX*****	18W	6000	2,090
LD80-281-XXX-60-XX*****	24W	6000	3,290

Also available in 4000K CCT.

Cutout dimensions: *Ø75 mm | **Ø108 mm | ***Ø135 mm | ****Ø157 mm | *****Ø178 mm | *****Ø205 mm | *****Ø279 mm



Iris Slim Square | LD81

Ultra sleek Recess mounted slim square downlighter.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LD81-200-XXX-60-XX*	3W	6000	490
LD81-350-XXX-60-XX**	6W	6000	890
LD81-530-XXX-60-XX***	9W	6000	950
LD81-101-XXX-60-XX****	12W	6000	1,290
LD81-131-XXX-60-XX*****	15W	6000	1,390
LD81-171-XXX-60-XX*****	18W	6000	2,090
LD81-281-XXX-60-XX*****	24W	6000	3,290

Also available in 4000K CCT.

Cutout dimensions: *75 mm x 75 mm | **108 mm x 108 mm | ***135 mm x 135 mm

****157 mm x 157 mm | *****178 mm x 178 mm | *****205 mm x 205 mm | *****279 mm x 279 mm

NEW



Iris Slim Neo | LD95

Recessed Slim LED Round Downlighter. Aesthetic White rim molded in engineering plastic. Offers best in class lumen output in edgelit technology, illuminating the interiors with more vibrancy and higher savings.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LD95-670-XXX-60-XX*	6W	6000	650
LD95-101-XXX-60-XX*	9W	6000	850
LD95-141-XXX-60-XX**	12W	6000	990
LD95-171-XXX-60-XX**	15W	6000	1,090
LD95-221-XXX-60-XX***	18W	6000	1,290

Cutout dimensions: *Ø96 mm | **Ø140 mm | ***Ø190 mm.

NEW

Iris Slim Neo | LD96

Recessed Slim LED Square Downlighter aesthetic rim molded in engineering plastic. Offers best in class lumen output in edgelit technology, illuminating the interiors with more vibrancy and higher savings.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LD96-670-XXX-60-XX*	6W	6000	650
LD96-101-XXX-60-XX*	9W	6000	850
LD96-141-XXX-60-XX**	12W	6000	990
LD96-171-XXX-60-XX**	15W	6000	1,090
LD96-221-XXX-60-XX***	18W	6000	1,290

Cutout dimensions: *96 mm x 96 mm | **140 mm x 140 mm | ***190 mm x 190 mm.



Iris Slim Surface Mounted | LD80

Ultra sleek surface mounted slim round downlighter.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LD80-350-XXX-60-SM	6W	6000	1,050
LD80-101-XXX-60-SM	12W	6000	1,490
LD80-131-XXX-60-SM	15W	6000	1,790
LD80-171-XXX-60-SM	18W	6000	2,390

Also available in 4000K CCT.



Iris Slim Surface Mounted | LD81

Ultra sleek surface mounted slim square downlighter.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LD81-350-XXX-60-SM	6W	6000	1,050
LD81-101-XXX-60-SM	12W	6000	1,490
LD81-131-XXX-60-SM	15W	6000	1,790
LD81-171-XXX-60-SM	18W	6000	2,390

Also available in 4000K CCT.



Trim Neo | LL20

Sleek and Seamless profiled extruded aluminium / polycarbonate batten with efficient diffuser to enlighten workspaces and retail spaces.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LL20-111-XXX-65NE3	10	6500	550
LL20-221-XXX-65NE3	20	6500	850
LL20-221-XXX-65AL1	20	6500	1,190



Pro LED Lamp | LL13

Linear lamp with PC housing for optimum light output . Specially designed diffuser to avoid direct view of LEDs.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LL13-181-650	18W	6500	990
LL13-181-65SE	20W	6500	1,150



Pro LED Lamp T5 | LL13

Linear lamp with PC housing for optimum light output. Specially designed diffuser to avoid direct view of LEDs.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LL13-181-65-T5	18W	6500	1,190


*Driver to be ordered separately.



Pro LED Compact | LL18

Compact lamp in aluminium housing with in-built driver for optimum light output. Specially designed for durable performance.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LL18-181-65PL1	18W	6500	1,050




LED Channel | WI092

Channel suitable to be used with T8 LED lamp.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
WI0921208	1X18W LED T8	6500	490
WI0922208	2X20W LED T8	6500	590

LED lamp to be ordered separately.



Skyline | LR02

Compact and Trendy LED Streetlight, Housing made of die-cast aluminium, with polycarbonate LENS for uniform light distribution. Rated IP66.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LR02-261-XXX-57-XX	20W	5700	2,790




Formz Striplight | LS06

Non-integral flexible LED strip light with high brightness for indoor and outdoor applications. Strip can be cut at marked interval to suit desired length.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LS06-005-120-WH-50	5W	6500	1,690
LS06-005-120-WW-50	5W	4000	1,690
LS06-015-120-WH-50	15W	6500	2,490
LS06-015-120-WW-50	15W	4000	2,490
LG40-024 (Driver)	25W	-	790
LG40-078 (Driver)	75W	-	1,490

*LG40-024 - 1 unit is suitable for 1 no. (5m spool) of LS06-005 | **LG40-78 - 1 unit is suitable for 1 no. (5m spool) of LS06-15 | *Order driver separately. Driver is for indoor use only. Also available in 3000K CCT.



Alpha Floodlight | LS06

Aluminium die-cast housing luminaire with unique reflector system for enhanced uniform illumination and toughened glass with silicon gasket for IP66 protection.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LF19-471-060-57-XX	40W	5700	5,990



Moon Round | LW01

ABS plastic housing with CRCA reflector and HET diffuser to enlighten gardens, parks, backyards and greenhouse areas with high efficiency and brightness. Suitable for wall/ceiling light .

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LW01-101-XXX-60-XX	9W	6000	2,490



Moon Square | LW02

ABS plastic housing with CRCA reflector and HET diffuser to enlighten gardens, parks, backyards and greenhouse areas with high efficiency and brightness. Suitable for wall/ceiling light.

Catalogue Reference No.	Wattage	CCT (K)	MRP ₹
LW02-101-XXX-60-XX	9W	6000	2,490

Items to be phased-out (available till stocks last)

Series	Catalogue Reference No.	List price (₹)
SkylineLED	LR02-171-XXX-57-XX	3,350
ImmaculateLED Platinum	LM25-361-XXX-65-G1	5950
	LM25-481-XXX-65-G1	6750
SpacioLED	LM15-361-XXX-57-XX	4390
	LM15-411-XXX-57-XX	4890
Matrix-ILED	LM17-401-XXX-57-XX	4490
	LM17-461-XXX-57-XX	4990
IrisLED Gold RF	LD71-111-SML-65-RF	1850
	LD71-161-SML-65-RF	1950
IrisLED Gold FD	LD71-111-SML-65-FD	150
	LD71-161-SML-65-FD	1850
IrisLED Gold DD	LD71-111-SML-65-DD	1750
	LD71-161-SML-65-DD	1850
IrisLED SQ	LD74-101-XXX-65-XX	2090
	LD74-121-XXX-65-XX	2190
	LD74-151-XXX-65-XX	2490
Halo (Surface Mounted)	CRDL11S008HP57	2590
	CRDL11S013HP57	2690
	CRDL11S017HP57	2950
	CRDL11S023HP57	3490
	CRDL11S033HP57	5790
SpherisLED	CRDL10R005HP60	990
	CRDL10R010HP60	1390
	CRDL10R015HP60	1790
Vision LED Retrofit	HC30-411-XXX-57-XX	6590
	HC30-551-XXX-57-XX	8990
Wellglass (LE02 Series)	LE02-441-XXX-57-OP	5500
	LE02-821-XXX-57-OP	7500
Strom LED	LE02-391-XXX-65-XX	5150
	LE02-521-XXX-65-XX	5590
Fantasy Bollard	CRLA11008HP57-05	6990
	CRLA11008HP57-08	7090
SquarisLED	CRDL15R005HP60	990
	CRDL15R010HP60	1390
	CRDL15R015HP60	1790
StimrisLED	CRDL14R005HP60	990
	CRDL14R010HP60	1390
	CRDL14R015HP60	1790
Wave	LM24-391-XXX-57-XX	5950
	LM24-421-XXX-57-XX	6490
Axeon Surface	LM34-251-XXX-57-SM	8290
Alpha Floodlight	LF20-392-060-57-XX	45990
Revo Floodlight (100W)	LF07-102-060-50-V5	18290
	LF07-102-090-50-V5	18290
Xline (LE11)	LE11-491-XXX-57-XX	4250
Vision LED Retrofit	HC30-411-XXX-57-XX	6590
	HC30-551-XXX-57-XX	8990
eSense (Scene select)	CRADSS11R010A	29,990
	CRADSS12R020A	50,990
	CRADSS13R010A	91,690

Terms and conditions

- Prices are in Indian rupees.
- LP/MRP are inclusive of GST. However authorized Wipro sales person/stockists can sell below the LP/MRP.
- All prices are subject to Wipro's general terms & conditions of business.
- Prices are subject to change without notice as per company discretion.
- This price list supersedes all earlier price lists.
- Company reserves the right to issue amendments, which may arise due to any errors in the price list.
- Goods are dispatched by us on purchaser's risk. All claims for loss, damage or shortage will be filed by the purchasers directly with the carriers.
- Orders should be placed in multiples of case lot.
- All orders shall be placed in writing.
- Items other than those included in the price list, stands phased out from the range.
- All fixtures will be supplied as per our normal specifications, for additional features please contact nearest Wipro office for details.
- Disputes, if any are subject to Pune jurisdiction only.
- Related wattage and CCT are nominal and BIS tolerance is applicable on same.

Innovation and improvement are a way of life at Wipro. All rights reserved. Reproduction of this data in part or in whole without permission is prohibited. Care has been taken to ensure that the information content within is correct. We reserve the right to modify the product without prior intimation. Photographs shown herein are indicative. Customers are advised to reconfirm the data or product dimensions before purchase with our local office.

Branch Offices

E-40/7, Okhla Industrial Area, Phase-II, New Delhi - 110 020 Tel: 011-4170 8121/29	1401/1402, 14 Floor, C-wing Lotus Corporate Park, Goregaon (East) Mumbai - 400 083 Tel: 022-6218 2000
No.139, 7th Cross, N S Palya, off. Bannerghatta Road, Bangalore - 560 076 Tel: 080-4150 3260	Economist House, S-15, First Cross Road, Thiru Vi Ka Industrial Estate, Guindy Chennai - 600 032 Tel: 95660 86333
3, Pretoria Street, 3rd floor, Kolkata - 700 071 Tel: 033-4404 5886/87	Bhosale Heights, 1195/5, Fergusson College Road, Pune - 411 005 Tel: 020-2553 5081
Plot No.,13 A/1, Road No. 9, IDA East Division Nacharam, R.R.Dist., Hyderabad - 500 076 Tel: 040-2717 6082	
S.C .O. - 208 - 209, 3rd Floor Sector - 34 A, Chandigarh - 160 022 Tel: 0172-501 8734	311, Pujer Complex, Subhanpura, Baroda - 390 023 Tel: 0265-2395 830/35/36/41/45
E/149, Transport Nagar, Lucknow Kanpur Road, Lucknow - 226 012 Tel: 0522-2434 352	United Compound, A.B. Road, Dewas Naka, Indore (MP) - 452 010 Tel: 98279 99668
H-409, Titanium City Centre, 100 ft. Road, Anand Nagar Ahmedabad - 380 015 Tel: 079-4007 3546	Hindustan Associates, Plot no. 135, Mancheshwar Industrial Estate, Rasulgarh, Bhubaneshwar - 751 010 Tel: 0674-6450 804
Khasra No.48.49/2, khedia Business Park, Tatibanth Raipur (CG) - 492 099 Tel: 0771-3265 725	Flat No. 8, Plot No. 191, 1st Floor, Rachna Apartment, Cement Road, Shivaji Nagar, Nagpur - 440 010 Tel: 0712-2569 878
1-99, Sirigudi Nagar, Yendada Vishakhapatnam - 530 045 Tel: 96769 08080/99449 825284	VI/409-D, Valomkottil Building, Opp. BMC, Sea Port-Air Port Road, P.O. Thrikkakkara, Cochin - 682 021 Tel: 98957 08464
9/10 Sri Vankatram Complex, VLB Nagar, OPP VLB Arts & Science College, Kovaipudur Road, Kuniamuthur, Coimbatore - 641 042	
B - 16/17, Palsania Complex, Near T B Hospital, Subhash Nagar Shopping Centre, Jaipur - 320 016 Tel: 0141-2280 014/4910 879	

WIPRO LIGHTING ADVANTAGE

- 25 years of Design excellence
- Service commitment – 19 branches and over 400 stockists
- Dedicated service network across the country
- Trustworthiness and reliability of Wipro
- Ease of contact through toll-free helpline

Authorised Stockist

Business Office:

Wipro Lighting, 5th floor, Godrej Eternia - C,
old Pune-Mumbai road, Shivajinagar, Pune 411 005. India.
(T) 020-66098700, (F) 020-66098777.
helpdesk.lighting@wipro.com

Registered Office:

Wipro Enterprises (P) Limited
'C' Block, CCLG Division, Doddakannelli, Sarjapur Road, Bangalore – 560035, India.

Innovation and Improvement are a way of life at Wipro. All rights reserved. Reproduction of this data in part or in whole without permission is prohibited. Care has been taken to ensure that the information content within is correct. We reserve the right to modify the product without prior intimation. Imitation of Registered Designs is a punishable offence.



www.wiprolighting.com
Toll-free no: 1800-425-1969
Follow us on [in](#) [t](#) [f](#) [i](#)

IoL™
Internet of Lighting